



(12) **United States Patent**
Ghafourifar et al.

(10) **Patent No.:** **US 12,093,755 B2**
(45) **Date of Patent:** ***Sep. 17, 2024**

(54) **APPLICATION PROGRAM INTERFACE
ANALYZER FOR A UNIVERSAL
INTERACTION PLATFORM**

(71) Applicant: **Entefy Inc.**, Palo Alto, CA (US)

(72) Inventors: **Alston Ghafourifar**, Los Altos Hills,
CA (US); **Philip Nathan Greenberg**,
San Diego, CA (US); **Neil Achtman**,
Mountain View, CA (US)

(73) Assignee: **Entefy Inc.**, Palo Alto, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **18/347,199**

(22) Filed: **Jul. 5, 2023**

(65) **Prior Publication Data**

US 2024/0004732 A1 Jan. 4, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/009,000, filed on
Sep. 1, 2020, now Pat. No. 11,740,950, which is a
(Continued)

(51) **Int. Cl.**
G06F 8/20 (2018.01)
G06F 9/50 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06F 9/543** (2013.01); **G06F 9/5027**
(2013.01); **G06F 9/541** (2013.01); **G06F**
40/40 (2020.01); **G06F 2209/5015** (2013.01)

(58) **Field of Classification Search**
CPC G06F 9/543; G06F 9/5027; G06F 9/541;
G06F 40/40; G06F 2209/5015
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,481,597 A 1/1996 Given
5,951,638 A 9/1999 Hoss

(Continued)

FOREIGN PATENT DOCUMENTS

WO 9931575 6/1999
WO 2013112570 A1 8/2013

OTHER PUBLICATIONS

Guangyi Xiao et al., "User Interoperability With Heterogeneous IoT
Devices Through Transformation," pp. 1486-1496, 2014.

(Continued)

Primary Examiner — Kevin L Young


Assistant Examiner — Abdou K Seye

(74) *Attorney, Agent, or Firm* — Haynes and Boone, LLP

(57) **ABSTRACT**

An application program interface (API) analyzer that deter-
mines protocols and formats to interact with a service
provider or smart device. The API analyzer identifies an API
endpoint or websites for the service provider or smart
device, determines a service category or device category,
selects a category-specific corpus, forms a service-specific
or device-specific corpus by appending information regard-
ing the service provider or smart device to the category-
specific corpus, and parses API documentation or the web-
sites.

20 Claims, 21 Drawing Sheets

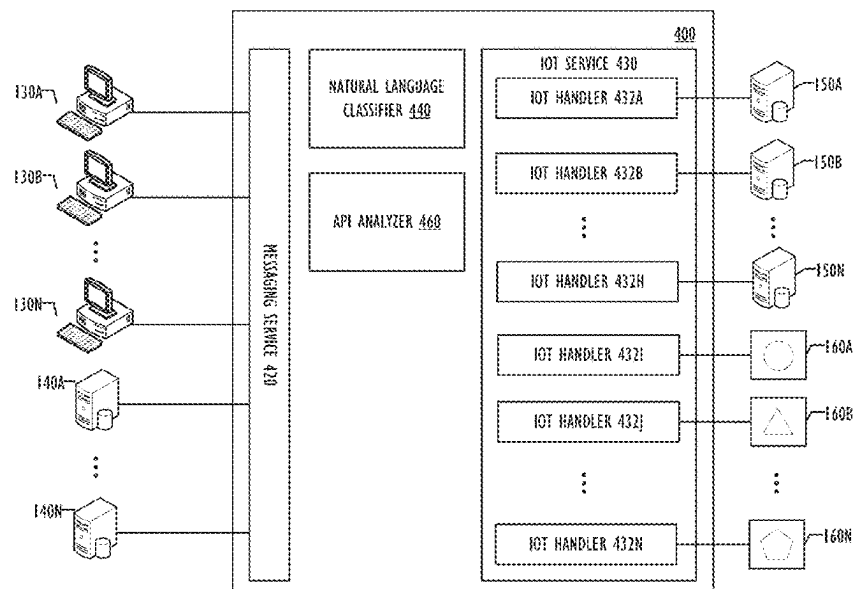

Related U.S. Application Data

continuation of application No. 16/511,944, filed on Jul. 15, 2019, now Pat. No. 10,761,910, which is a continuation of application No. 14/986,157, filed on Dec. 31, 2015, now Pat. No. 10,353,754, which is a continuation of application No. 14/986,111, filed on Dec. 31, 2015, now Pat. No. 10,135,764.

(51) **Int. Cl.****G06F 9/54** (2006.01)**G06F 40/40** (2020.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

6,101,320	A	8/2000	Schuetze	2009/0292814	A1	11/2009	Ting
6,950,502	B1	9/2005	Jenkins	2009/0299996	A1	12/2009	Yu
7,450,937	B1	11/2008	Claudatos	2010/0057872	A1	3/2010	Koons
7,673,327	B1	3/2010	Polis	2010/0210291	A1	8/2010	Lauer
7,680,752	B1	3/2010	Clune, III	2010/0220585	A1	9/2010	Poulson
7,886,000	B1	2/2011	Polis	2010/0223341	A1	9/2010	Manolescu
7,908,647	B1	3/2011	Polis	2010/0229107	A1	9/2010	Turner
8,090,787	B2	1/2012	Polis	2010/0250578	A1	9/2010	Athsani
8,095,592	B2	1/2012	Polis	2010/0312644	A1	12/2010	Borgs
8,108,460	B2	1/2012	Polis	2010/0323728	A1	12/2010	Gould
8,112,476	B2	2/2012	Polis	2010/0325227	A1	12/2010	Novy
8,122,080	B2	2/2012	Polis	2010/0332217	A1	12/2010	Wintner
8,156,183	B2	4/2012	Polis	2011/0010182	A1	1/2011	Turski
8,281,125	B1	10/2012	Briceno	2011/0051913	A1	3/2011	Kesler
8,296,360	B2	10/2012	Polis	2011/0078247	A1	3/2011	Jackson
8,433,705	B1	4/2013	Dredze	2011/0078256	A1	3/2011	Wang
8,438,223	B2	5/2013	Polis	2011/0078267	A1	3/2011	Lee
8,458,256	B2	6/2013	Polis	2011/0130168	A1	6/2011	Vendrow
8,458,292	B2	6/2013	Polis	2011/0185027	A1	7/2011	Pearson
8,458,347	B2	6/2013	Polis	2011/0194629	A1	8/2011	Bekanich
8,468,202	B2	6/2013	Polis	2011/0219008	A1	9/2011	Been
8,527,525	B2	9/2013	Fong	2011/0265010	A1	10/2011	Ferguson
8,918,468	B1	12/2014	Fisher	2011/0276640	A1	11/2011	Jesse
8,954,988	B1	2/2015	Laredo	2011/0279458	A1	11/2011	Gnanasambandam
8,959,156	B2	2/2015	Polis	2011/0295851	A1	12/2011	El-Saban
9,529,522	B1	12/2016	Barros	2012/0016858	A1	1/2012	Rathod
9,875,494	B2 *	1/2018	Kalns	2012/0209847	A1	8/2012	Rangan
10,019,994	B2 *	7/2018	Keen	2012/0210253	A1	8/2012	Luna
10,417,037	B2 *	9/2019	Gruber	2012/0221962	A1	8/2012	Lew
2002/0133509	A1	9/2002	Johnston	2012/0291072	A1	11/2012	Maddison
2002/0152091	A1	10/2002	Nagaoka	2013/0018945	A1	1/2013	Vendrow
2002/0178000	A1	11/2002	Aktas	2013/0024521	A1	1/2013	Pocklington
2002/0194322	A1	12/2002	Nagata	2013/0067345	A1	3/2013	Das
2004/0117507	A1	6/2004	Torma	2013/0097279	A1	4/2013	Polis
2004/0137884	A1	7/2004	Engstrom	2013/0110515	A1	5/2013	Guzzoni
2004/0243719	A1	12/2004	Roselinsky	2013/0111487	A1	5/2013	Cheyser
2004/0266411	A1	12/2004	Galicja	2013/0127864	A1	5/2013	Nevin, III
2005/0015443	A1	1/2005	Levine	2013/0151508	A1	6/2013	Kurabayashi
2005/0080857	A1	4/2005	Kirsch	2013/0197915	A1	8/2013	Burke
2005/0198159	A1	9/2005	Kirsch	2013/0262385	A1	10/2013	Kumarasamy
2006/0041423	A1	2/2006	Kline	2013/0262852	A1	10/2013	Roeder
2006/0193450	A1	8/2006	Flynt	2013/0267264	A1	10/2013	Abuelsaad
2007/0054676	A1	3/2007	Duan	2013/0268516	A1	10/2013	Chaudhri
2007/0073816	A1	3/2007	Kumar	2013/0304830	A1	11/2013	Olsen
2007/0116195	A1	5/2007	Thompson	2013/0325343	A1	12/2013	Blumenberg
2007/0130273	A1	6/2007	Huynh	2013/0332308	A1	12/2013	Linden
2007/0237135	A1	10/2007	Trevallyn-Jones	2014/0020047	A1	1/2014	Liebmman
2007/0299796	A1	12/2007	MacBeth	2014/0032538	A1	1/2014	Arngren
2008/0062133	A1	3/2008	Wolf	2014/0149399	A1	5/2014	Kurzion
2008/0088428	A1	4/2008	Pitre	2014/0270131	A1	9/2014	Hand
2008/0112546	A1	5/2008	Fletcher	2014/0280460	A1	9/2014	Nemer
2008/0236103	A1	10/2008	Lowder	2014/0297807	A1	10/2014	Dasgupta
2008/0261569	A1	10/2008	Britt	2015/0039887	A1	2/2015	Kahol
2009/0016504	A1	1/2009	Mantell	2015/0095021	A1	4/2015	Spivack
2009/0119370	A1	5/2009	Stern	2015/0095127	A1	4/2015	Patel
2009/0177477	A1	7/2009	Nenov	2015/0149484	A1	5/2015	Kelley
2009/0177484	A1	7/2009	Davis	2015/0186455	A1	7/2015	Horling
2009/0177744	A1	7/2009	Marlow	2015/0261496	A1	9/2015	Faaborg
2009/0181702	A1	7/2009	Vargas	2015/0278370	A1	10/2015	Stratvert
2009/0271486	A1	10/2009	Ligh	2015/0281184	A1	10/2015	Cooley
				2015/0286747	A1	10/2015	Anastasakos
				2015/0286943	A1	10/2015	Wang
				2015/0339405	A1	11/2015	Vora
				2016/0048548	A1	2/2016	Thomas
				2016/0057207	A1	2/2016	Li
				2016/0078030	A1	3/2016	Brackett
				2016/0087944	A1	3/2016	Downey
				2016/0092959	A1	3/2016	Gross
				2016/0173578	A1	6/2016	Sharma
				2016/0379136	A1	12/2016	Chen
				2017/0039246	A1	2/2017	Bastide
				2017/0039296	A1	2/2017	Bastide
				2017/0206276	A1	7/2017	Gill
				2017/0220963	A1	8/2017	Canaran
				2017/0286155	A1	10/2017	Hosabettu
				2017/0364587	A1	12/2017	Krishnamurthy

(56)

References Cited


U.S. PATENT DOCUMENTS

2018/0048661 A1 2/2018 Bird
2018/0101506 A1 4/2018 Hodaei

OTHER PUBLICATIONS

Marr, Bernard, Key Business Analytics, Feb. 2016, FT Publishing
International, Ch. 17 "Neural Network Analysis" (Year: 2016).

* cited by examiner

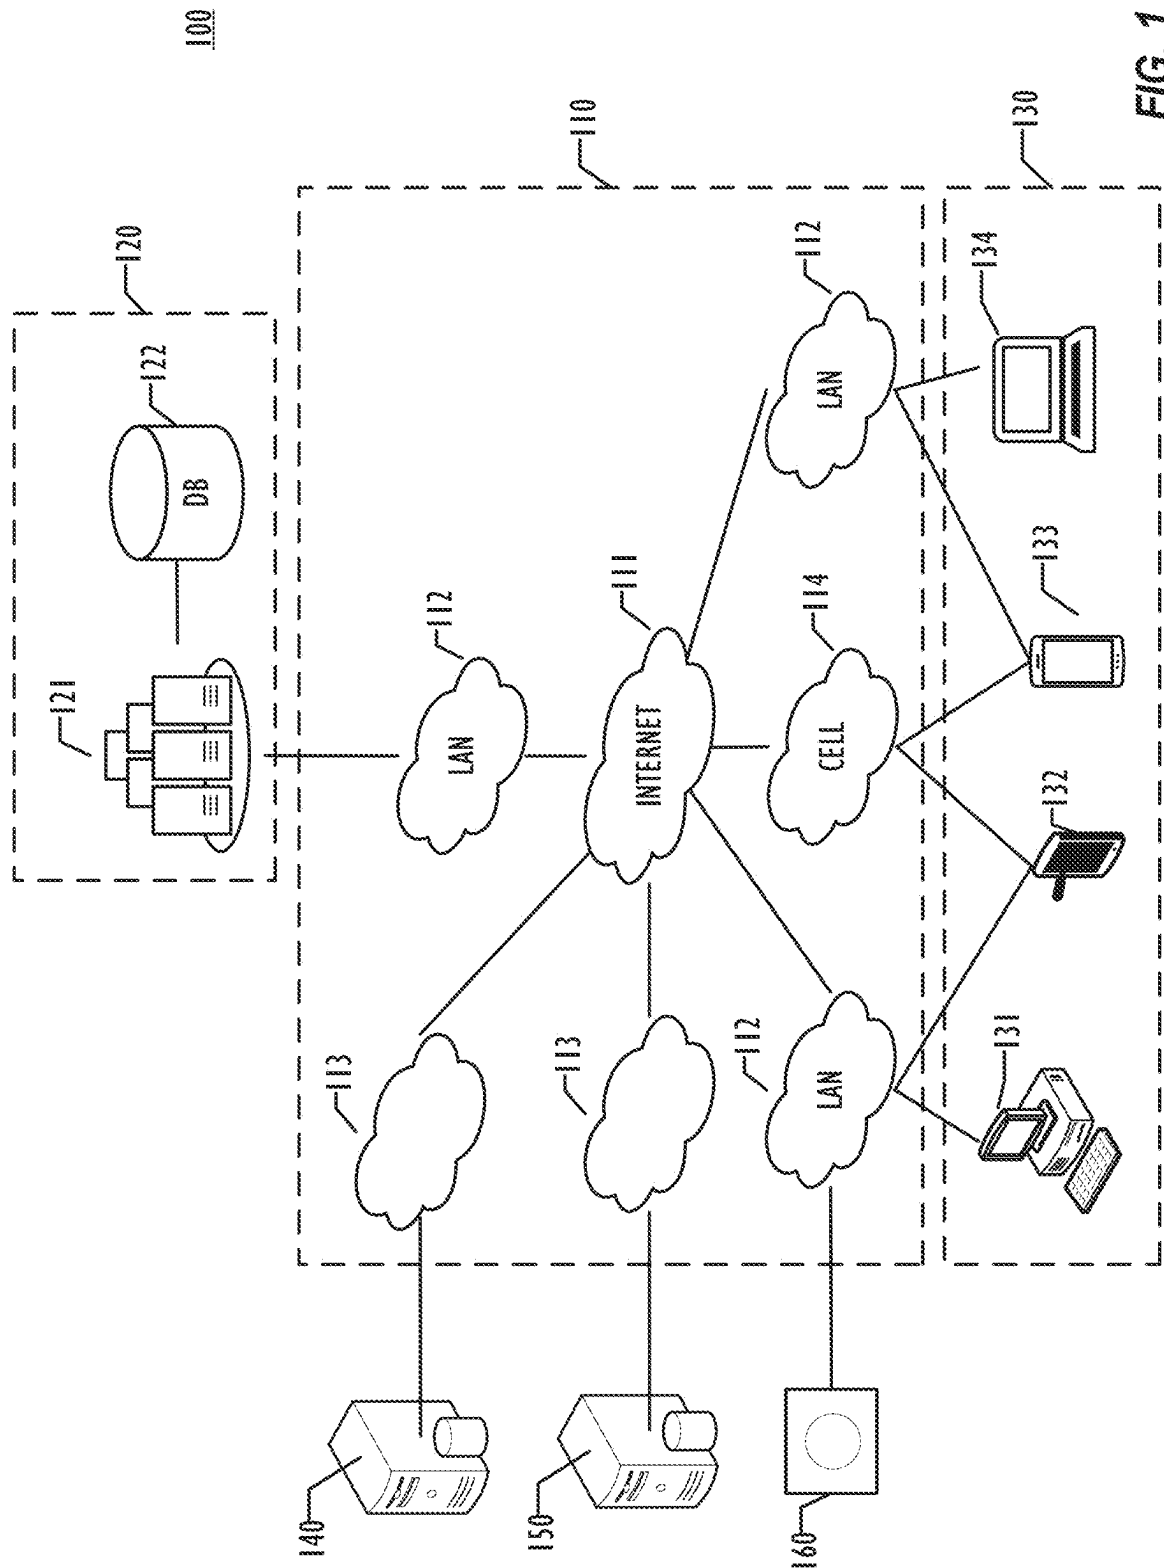

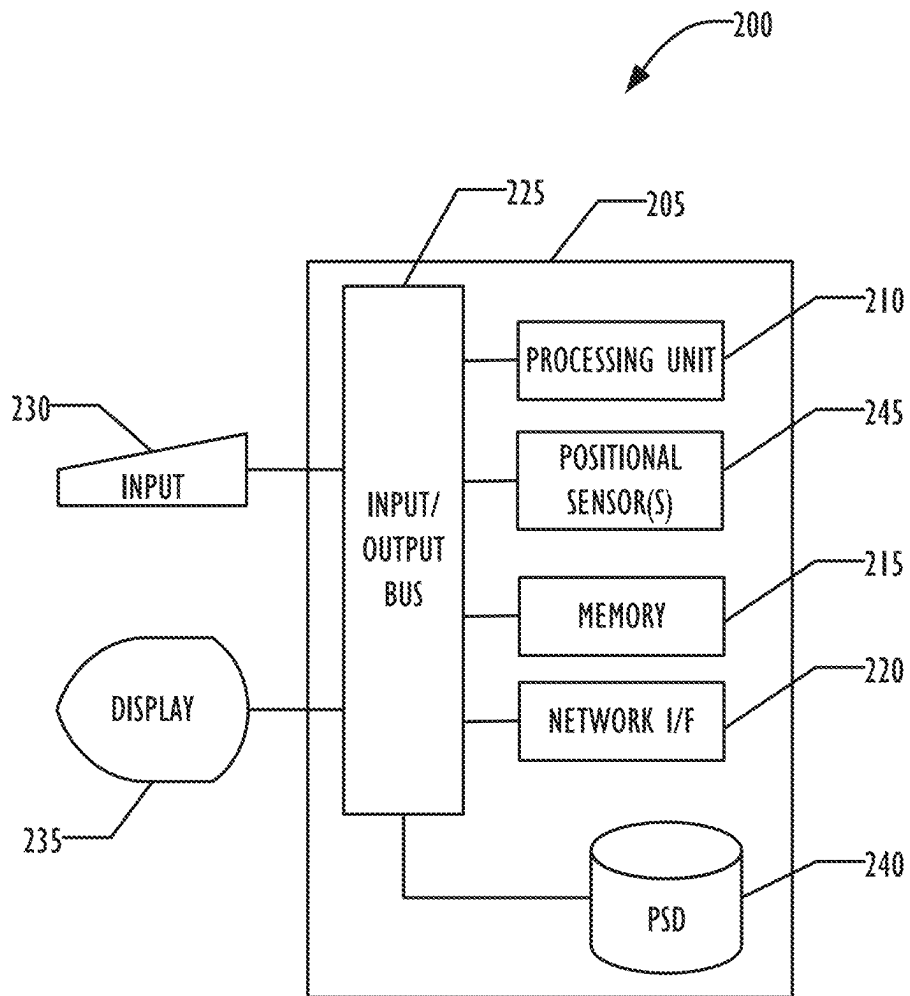
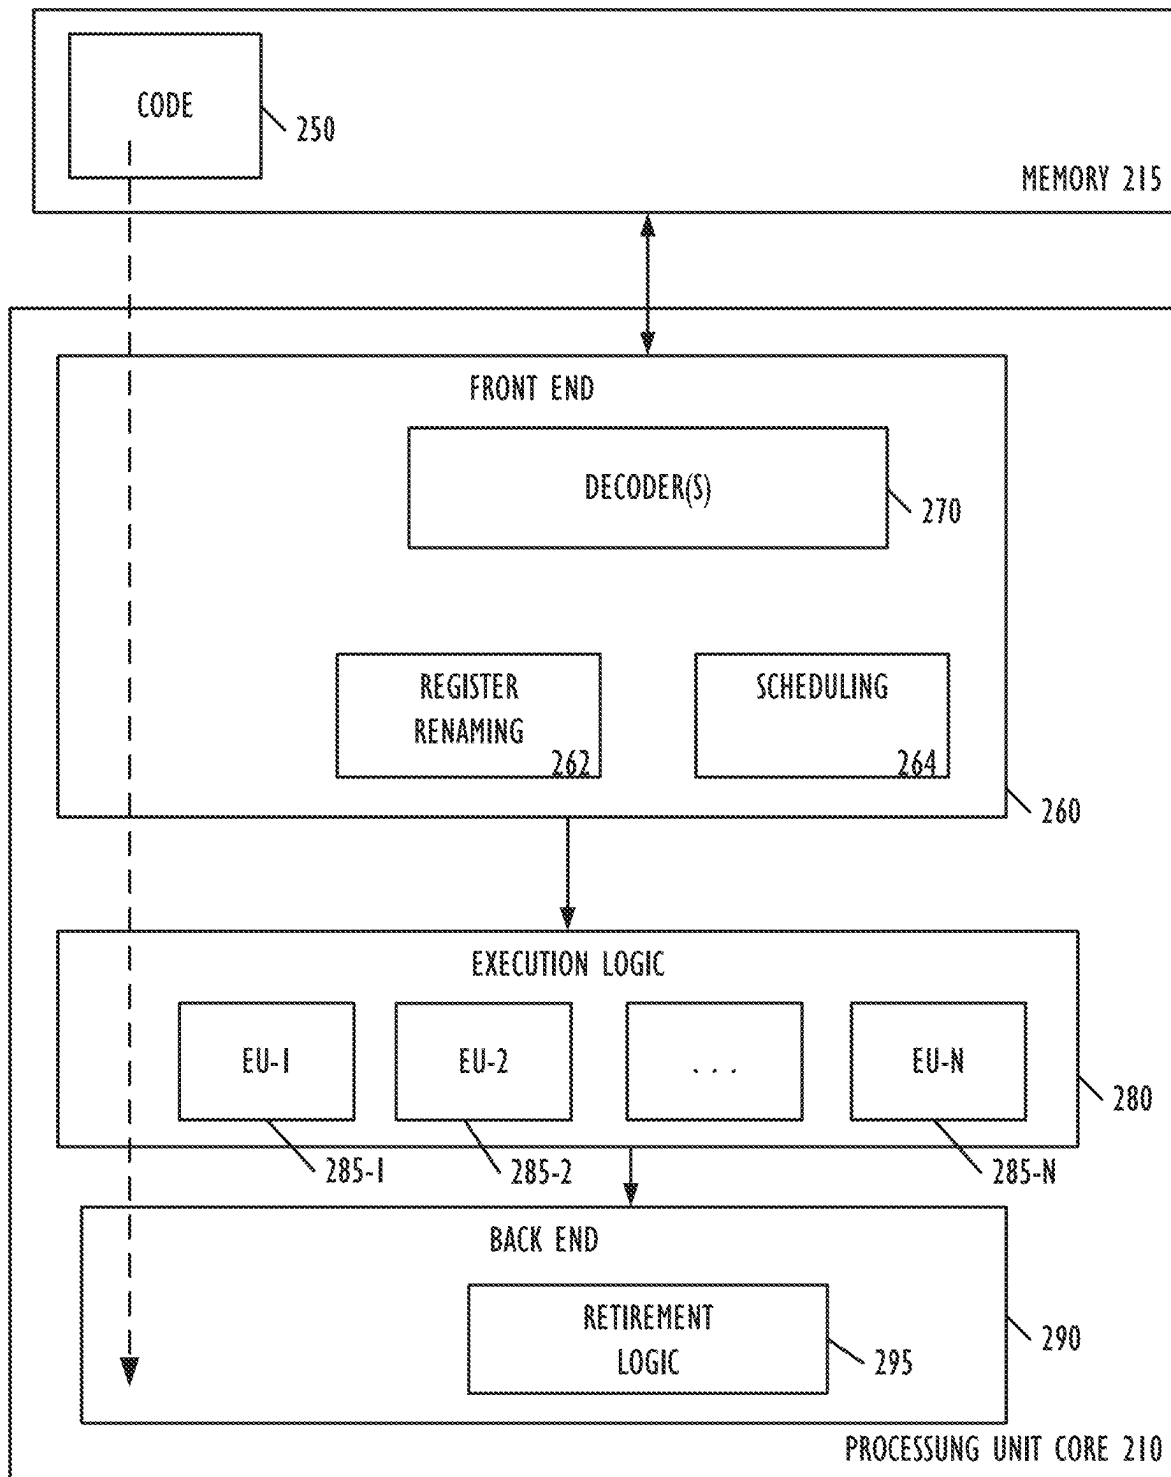


FIG. 2A

**FIG. 2B**

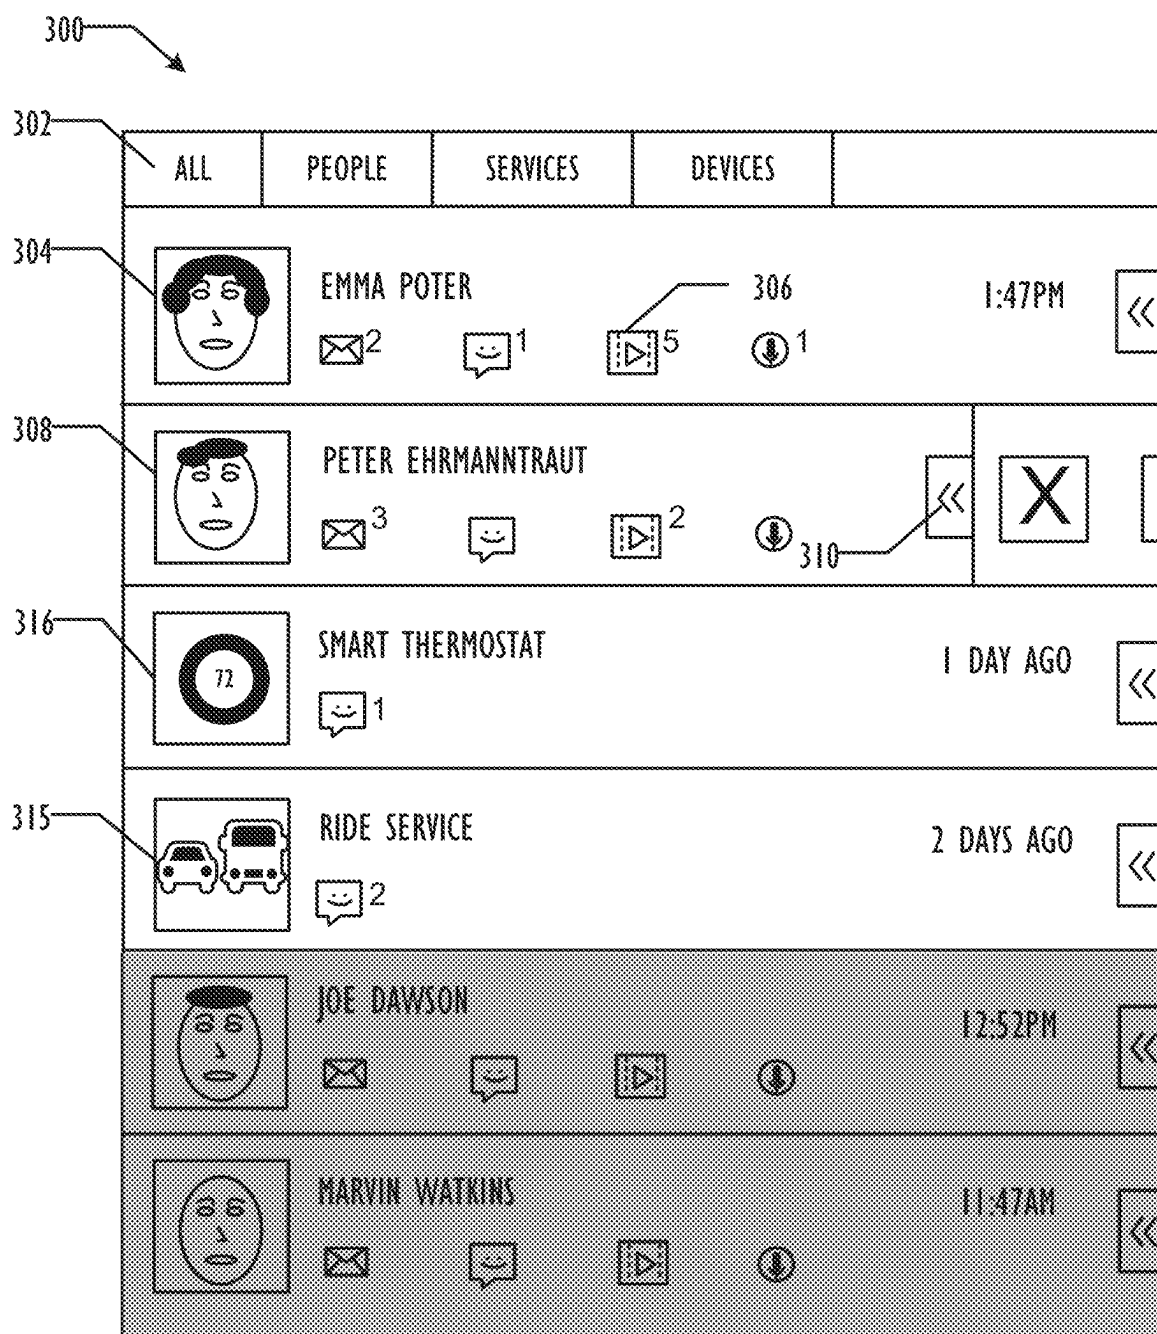


FIG. 3A

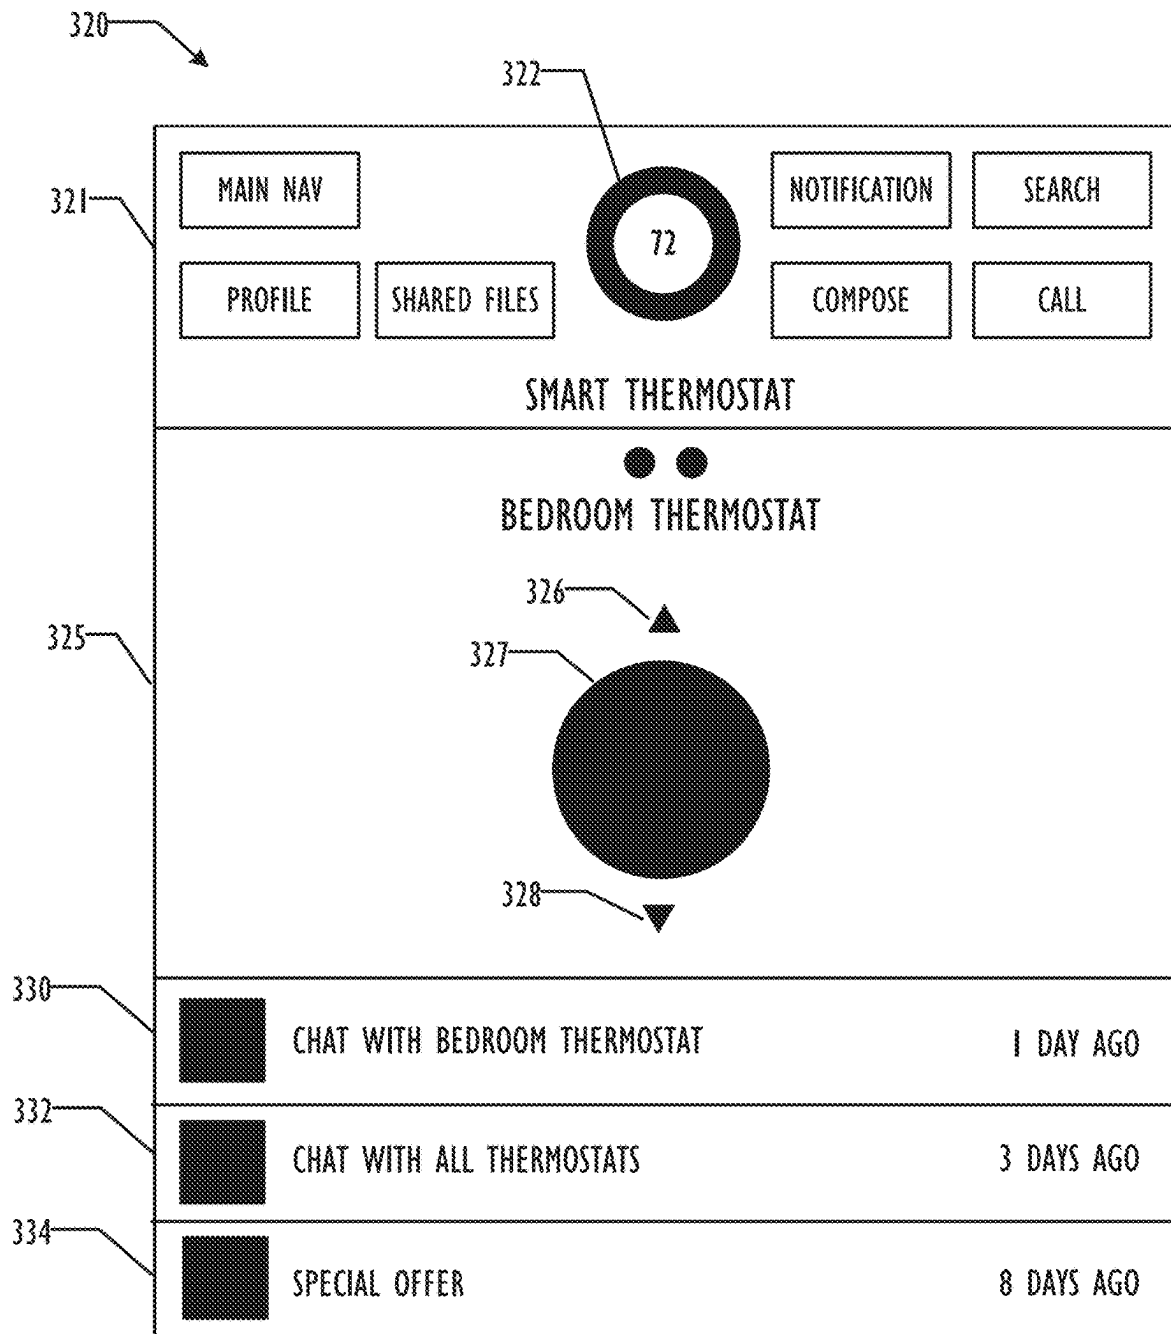


FIG. 3B

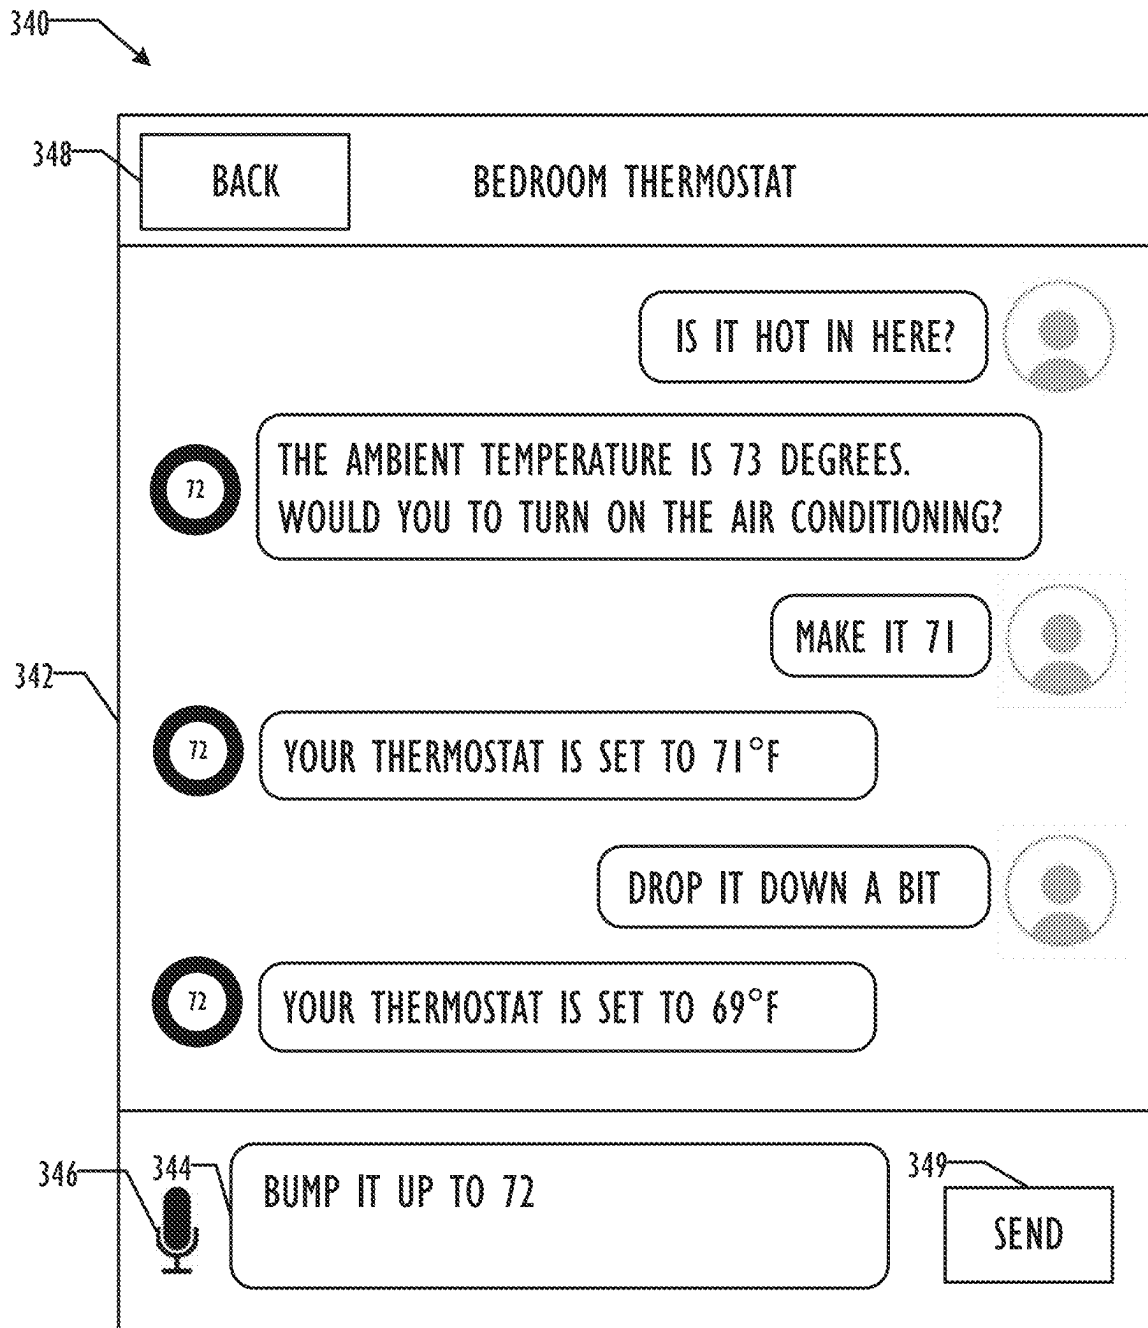


FIG. 3C

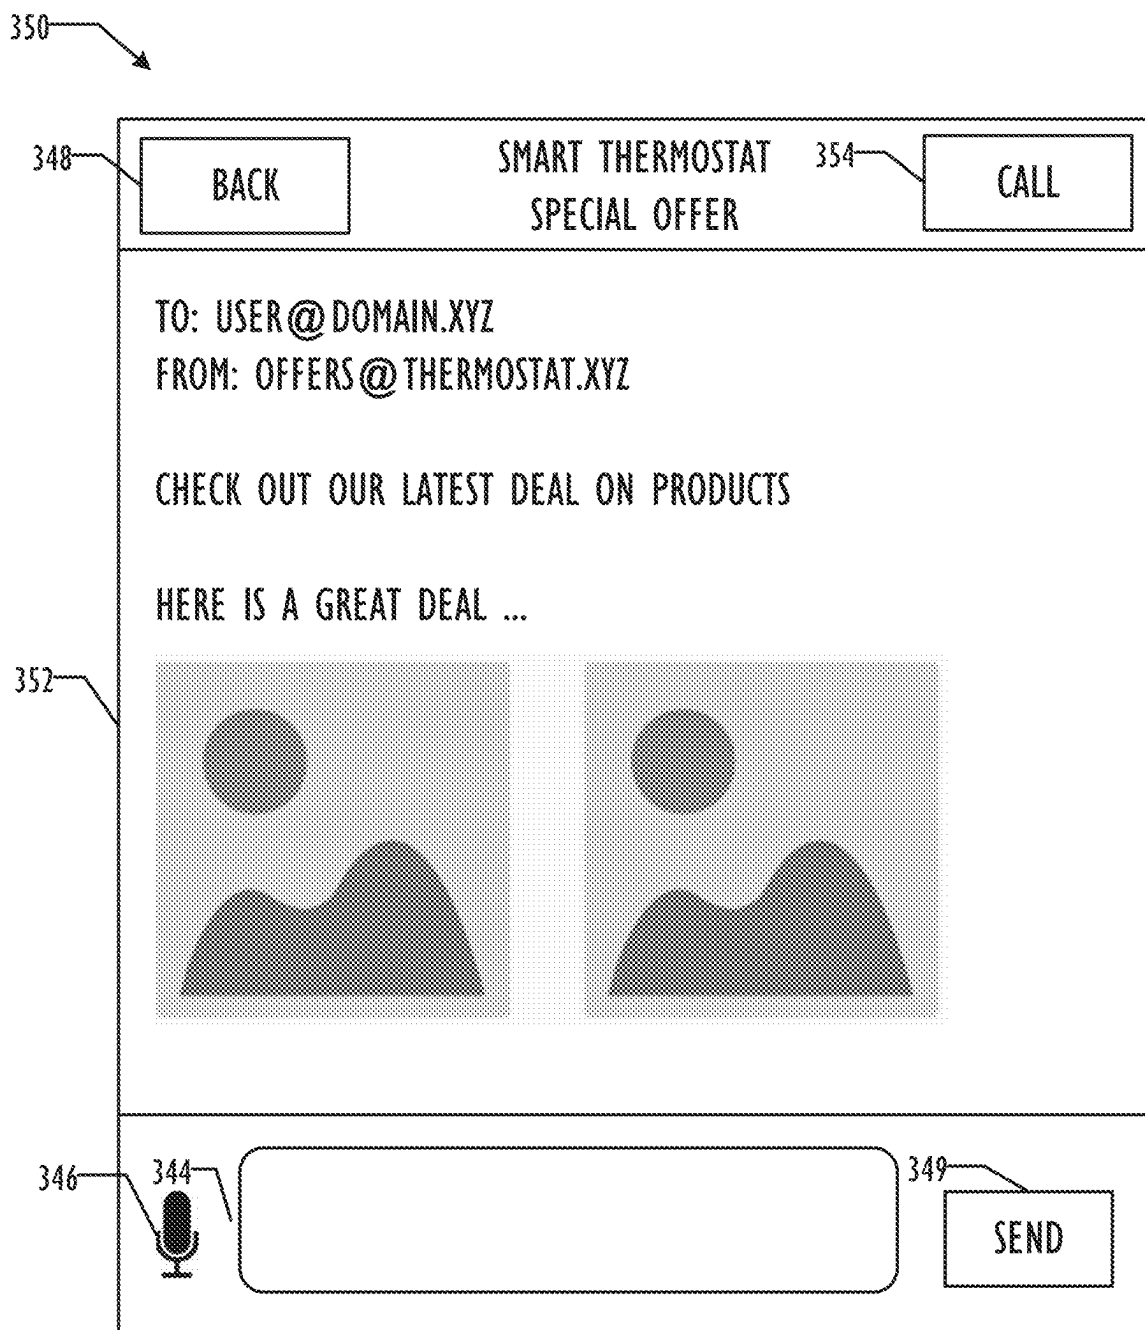


FIG. 3D

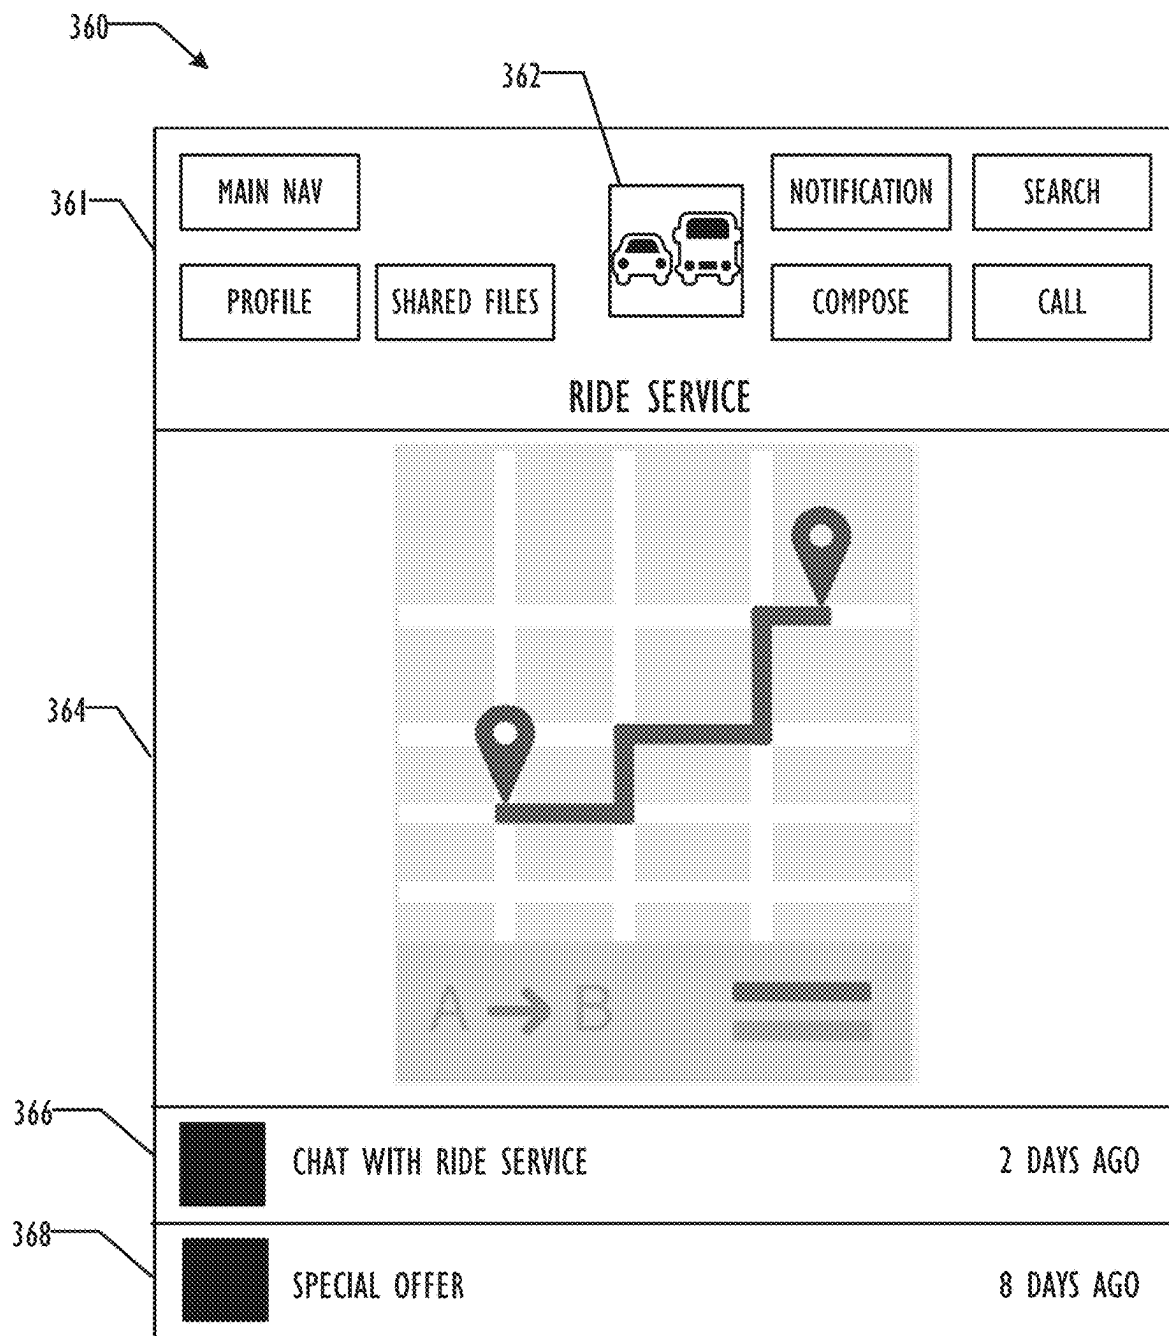


FIG. 3E

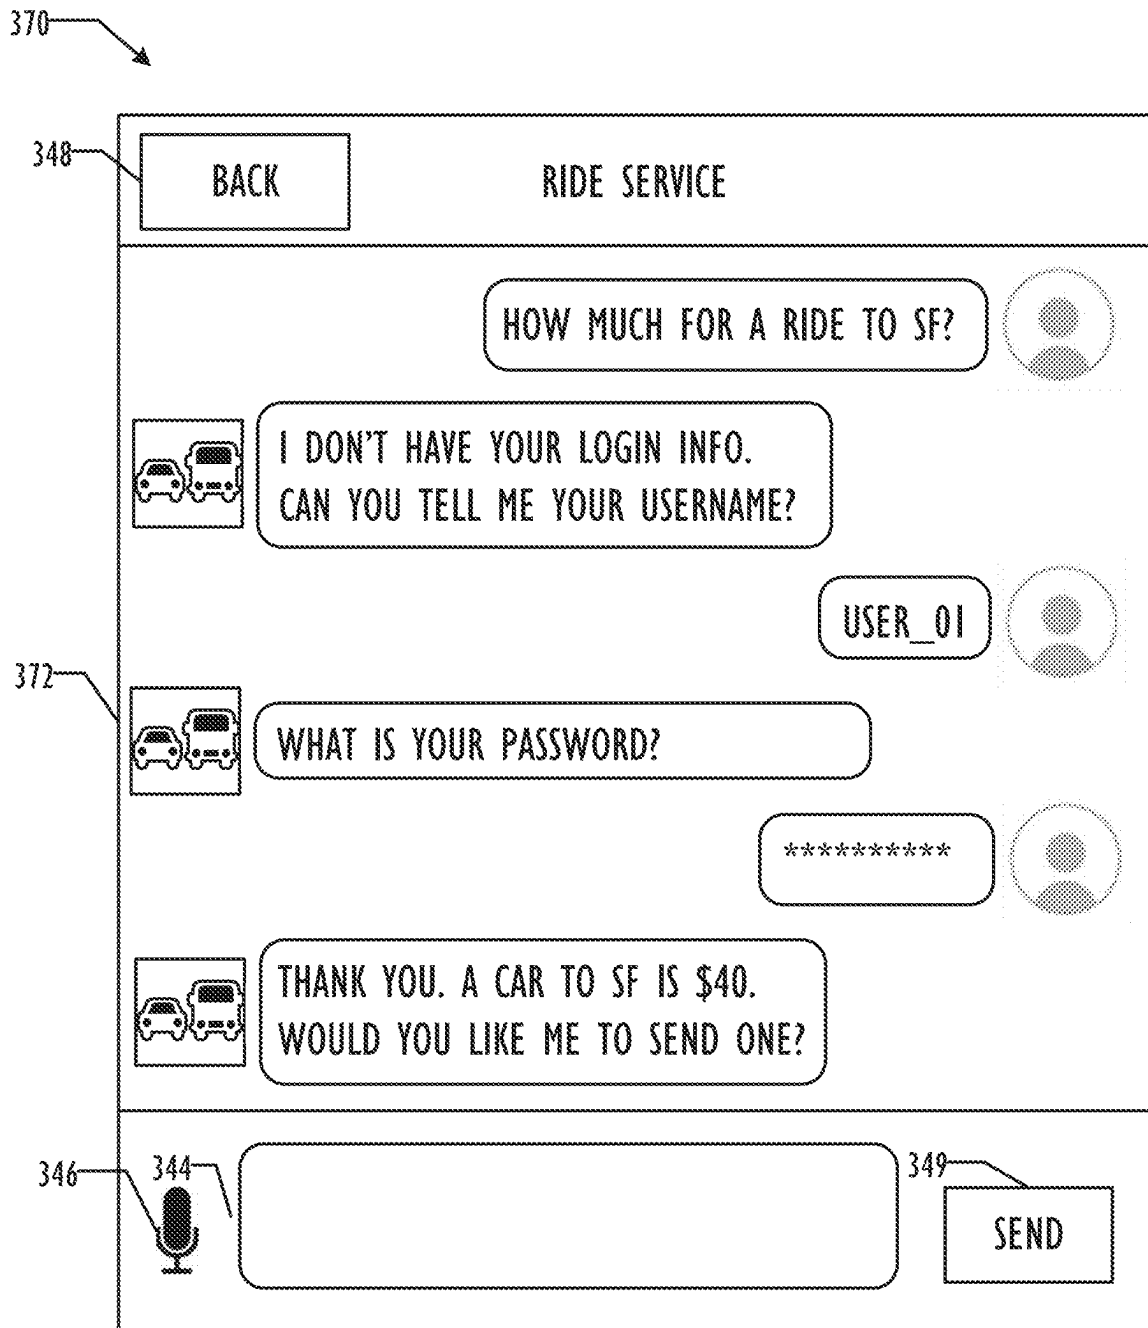


FIG. 3F


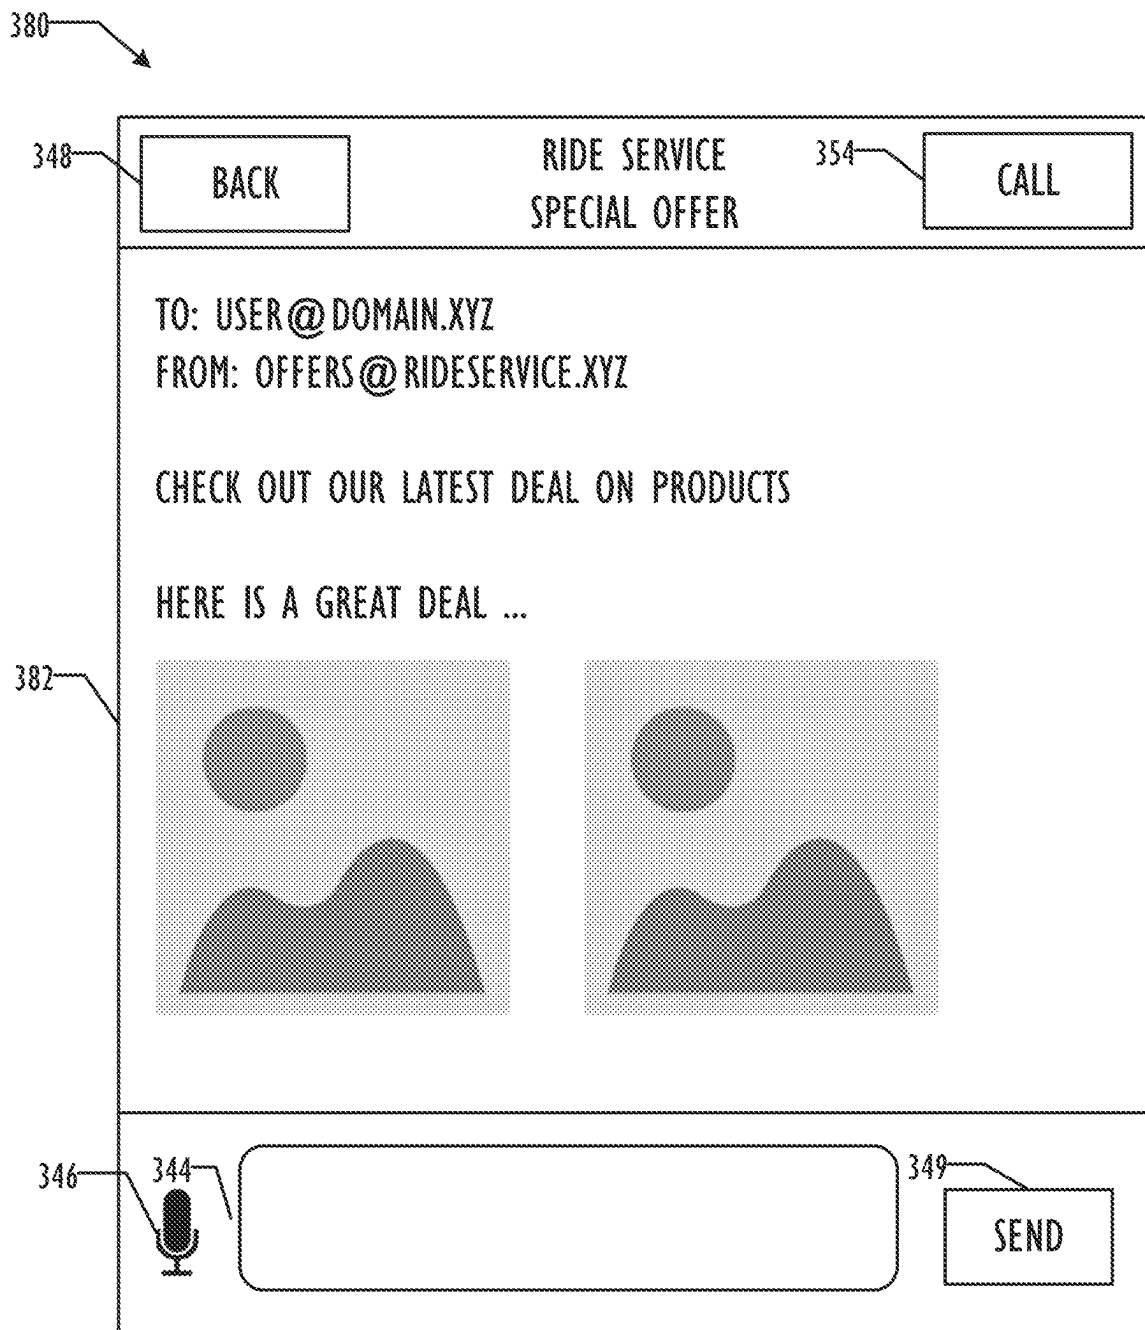


FIG. 3G

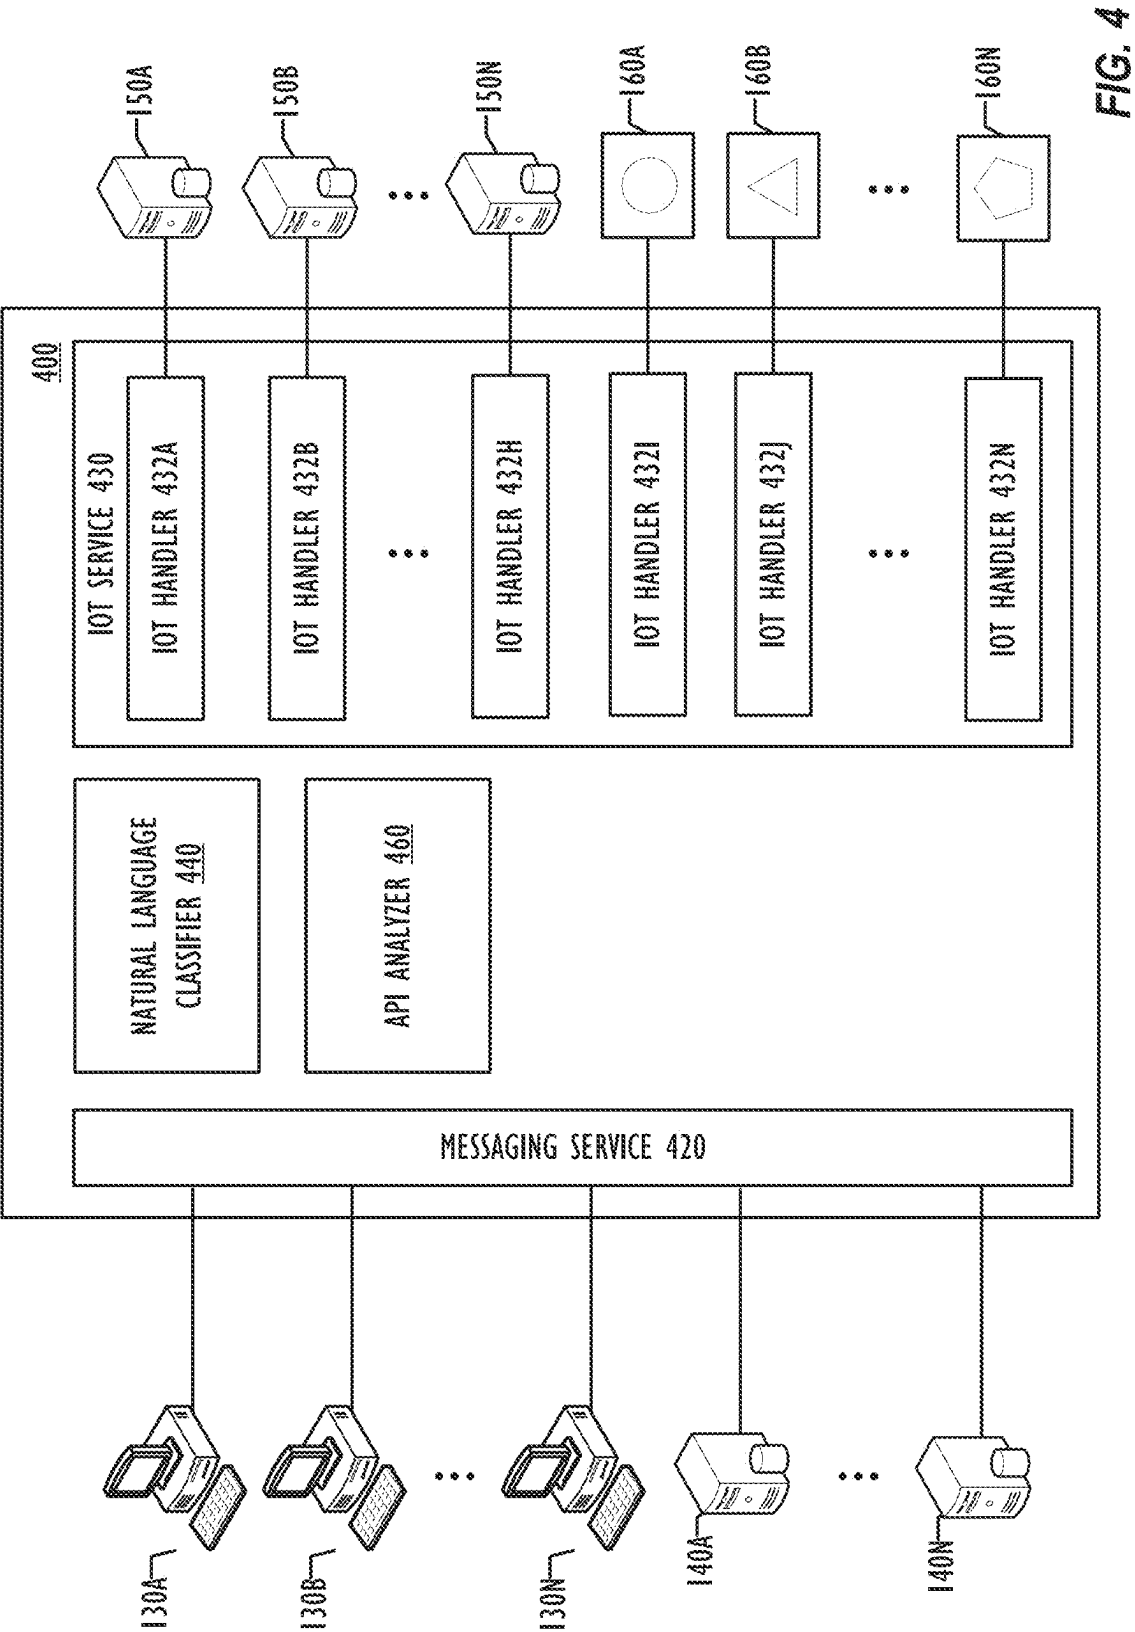

Zone	Stations	Northbound Trains													
		309	211	313	215	217	319	221	323	225	227	329	231	233	135
6	Gilroy	7150 MONTEREY ST. GILROY 95020				6:07		6:28			7:05				
6	San Martin					6:16		6:37			7:14				
6	Morgan Hill					6:22		6:43			7:20				
5	Blossom Hill					6:35		6:56			7:33				
5	Capitol					6:41		7:02			7:39				
4	Tamien	5:56	—	—	—	6:49	6:56	7:10	—	—	7:47	7:56	—	8:33	—
4	San Jose Diridon	6:03	6:20	6:45	6:50	6:57	7:03	7:18	7:45	7:50	7:55	8:03	8:20	8:40	9:15
4	College Park	—	—	—	—	—	—	—	—	—	7:58	—	—	—	—
4	Santa Clara	—	6:25	—	—	7:02	—	7:23	—	—	8:02	—	8:25	8:45	9:20
4	Lawrence	—	—	—	—	7:12	—	7:28	—	—	8:12	—	—	8:50	9:25
3	Sunnyvale	6:13	6:32	—	7:00	7:18	7:13	7:32	—	8:00	8:18	8:14	8:32	8:54	9:29
3	Mountain View	—	6:37	6:57	7:05	7:23	—	7:37	7:57	8:05	8:23	—	8:37	9:00	9:34
3	San Antonio	—	—	—	—	7:27	—	—	—	—	8:27	—	—	9:04	9:38
3	California Ave	—	—	—	7:11	7:31	—	—	—	8:11	8:31	—	—	9:08	9:42
3	Palo Alto	6:23	—	7:05	7:16	7:36	7:23	—	8:05	8:16	8:36	8:25	—	9:14	9:46
3	Menlo Park	—	6:45	—	—	7:39	—	7:45	—	—	8:39	—	8:45	9:17	9:49
2	Redwood City	6:30	6:51	—	—	7:45	7:30	7:51	—	—	8:45	8:33	8:51	9:23	9:54
2	San Carlos	—	6:55	—	7:24	—	—	7:55	—	8:24	—	—	8:55	9:27	9:58
2	Belmont	—	6:58	—	—	—	—	7:58	—	—	—	—	8:58	9:30	10:01
2	Hillsdale	—	7:02	7:16	7:28	7:51	—	8:02	8:16	8:28	8:51	—	9:02	9:33	10:04

FIG. 5A

Real Time

Realtime Departures

09/16/17 AM

Choose a station and click Select

Mountain View

Select

SOUTHBOUND

220 Limited 22 min.

322 Baby Bullet 28 min.

324 Baby Bullet 42 min.

NORTHBOUND

227 Limited 5 min.

231 Limited 19 min.

233 Limited 42 min.

FIG. 5B

Function	Method	Endpoint	Parameters
List products	GET	/v1/products	latitude longitude
Get price estimates	GET	/v1/estimates/price	start_latitude start_longitude end_latitude end_longitude
Get time estimates	GET	/v1/estimates/time	start_latitude start_longitude customer_uid (optional) product_id (optional)
Create ride request	POST	/v1/requests	product_id start_latitude start_longitude end_latitude (optional) end_longitude (optional) surge_confirmation_id (optional)

FIG. 6A


STATUS-CODE: 200 OK

```
{
  "PRODUCTS": [
    {
      "CAPACITY": 4,
      "DESCRIPTION": "THE LOW-COST UBER",
      "PRICE_DETAILS": {
        "DISTANCE_UNIT": "MILE",
        "COST_PER_MINUTE": 0.26,
        "SERVICE_FEES": [
          {
            "FEE": 1.0,
            "NAME": "SAFE RIDES FEE"
          }
        ],
        "MINIMUM": 5.0,
        "COST_PER_DISTANCE": 1.3,
        "BASE": 2.2,
        "CANCELLATION_FEE": 5.0,
        "CURRENCY_CODE": "USD"
      },
      "IMAGE": "HTTP://D1A3F4SPAZZRP4.CLOUDFRONT.NET/CAR.JPG",
      "DISPLAY_NAME": "CARX",
      "PRODUCT_ID": "A1111C8C-C720-46C3-8534-2FCDD730040D"
    },
    {
      "CAPACITY": 6,
      "DESCRIPTION": "LOW-COST RIDES FOR LARGE GROUPS",
      "PRICE_DETAILS": {
        "DISTANCE_UNIT": "MILE",
        "COST_PER_MINUTE": 0.45,
        "SERVICE_FEES": [
          {
            "FEE": 1.0,
            "NAME": "SAFE RIDES FEE"
          }
        ],
        "MINIMUM": 8.0,
        "COST_PER_DISTANCE": 2.15,
        "BASE": 5.0,
        "CANCELLATION_FEE": 5.0,
        "CURRENCY_CODE": "USD"
      },
      "IMAGE": "HTTP://D1A3F4SPAZZRP4.CLOUDFRONT.NET/CAR.JPG",
      "DISPLAY_NAME": "CARXL",
      "PRODUCT_ID": "821415D8-3BD5-4E27-9604-194E4359A449"
    }
  ]
}
```

FIG. 6B

Metadata		Example
access_token		c.FmDPkzyzaQe...
client_version		17
Data Values	Permission	Example
device_id	read	peyijNo0ldT2YlIVtVaGQ
locale	read	en-US
software_version	read	4.0
structure_id	read	VqFabWH21nwVyd4...
name	read	Hallway (upstairs)
name_long	read	Hallway Thermostat (upstairs)
last_connection	read	2015-12-31T23:59:59.000Z
is_online	read	TRUE
can_cool	read	TRUE
can_heat	read	TRUE
is_using_emergency_heat	read	TRUE
has_fan	read	TRUE
fan_timer_active	read	TRUE
fan_timer_timeout	read	2015-12-31T23:59:59.000Z
has_leaf	read	FALSE
temperature_scale	read	F
target_temperature_f	read/write	72
target_temperature_c	read/write	21.5
target_temperature_high_f	read/write	80
target_temperature_high_c	read/write	24.5
target_temperature_low_f	read/write	65
target_temperature_low_c	read/write	19.5
away_temperature_high_f	read	80
away_temperature_high_c	read	24.5
away_temperature_low_f	read	65
away_temperature_low_c	read	19.5
hvac_mode	read/write	heat-cool
ambient_temperature_f	read	72
ambient_temperature_c	read	21.5
humidity	read	35
hvac_state	read	heating
where_id	read	d6reb_OZTM...

FIG. 7

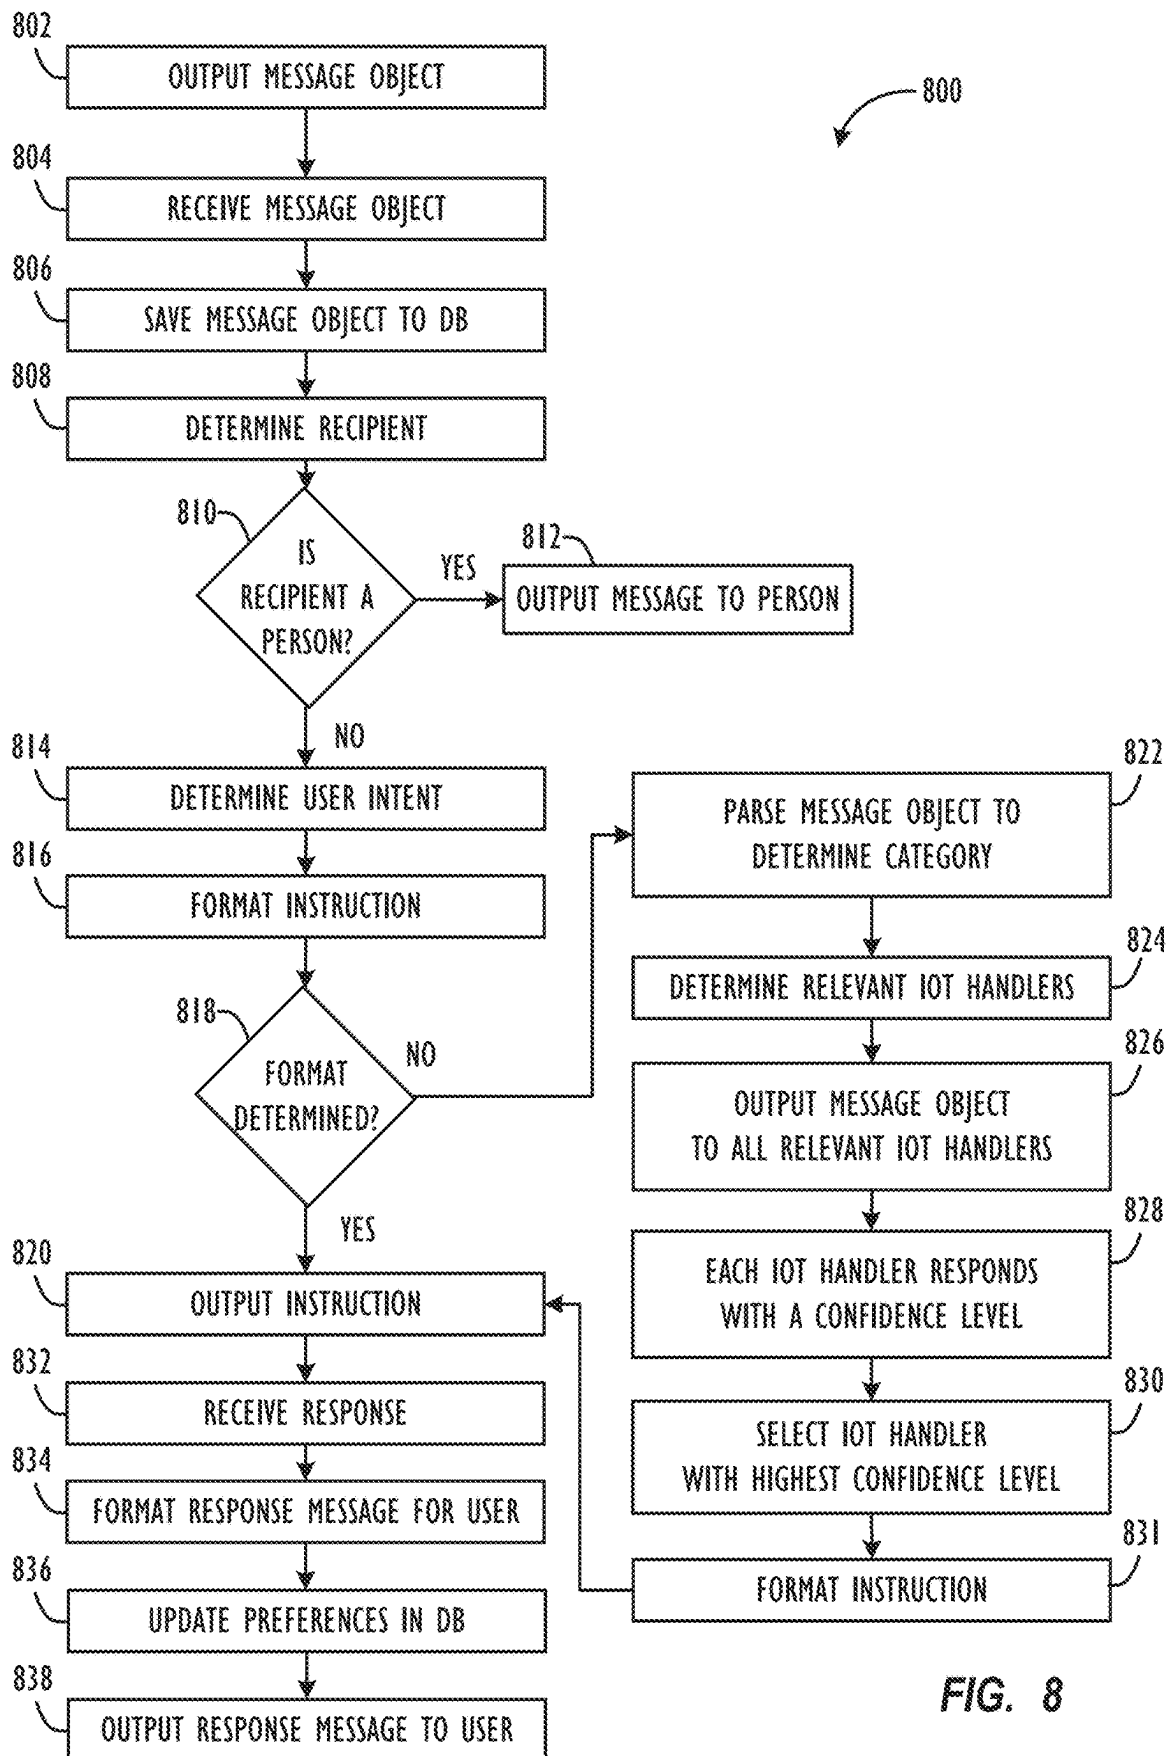

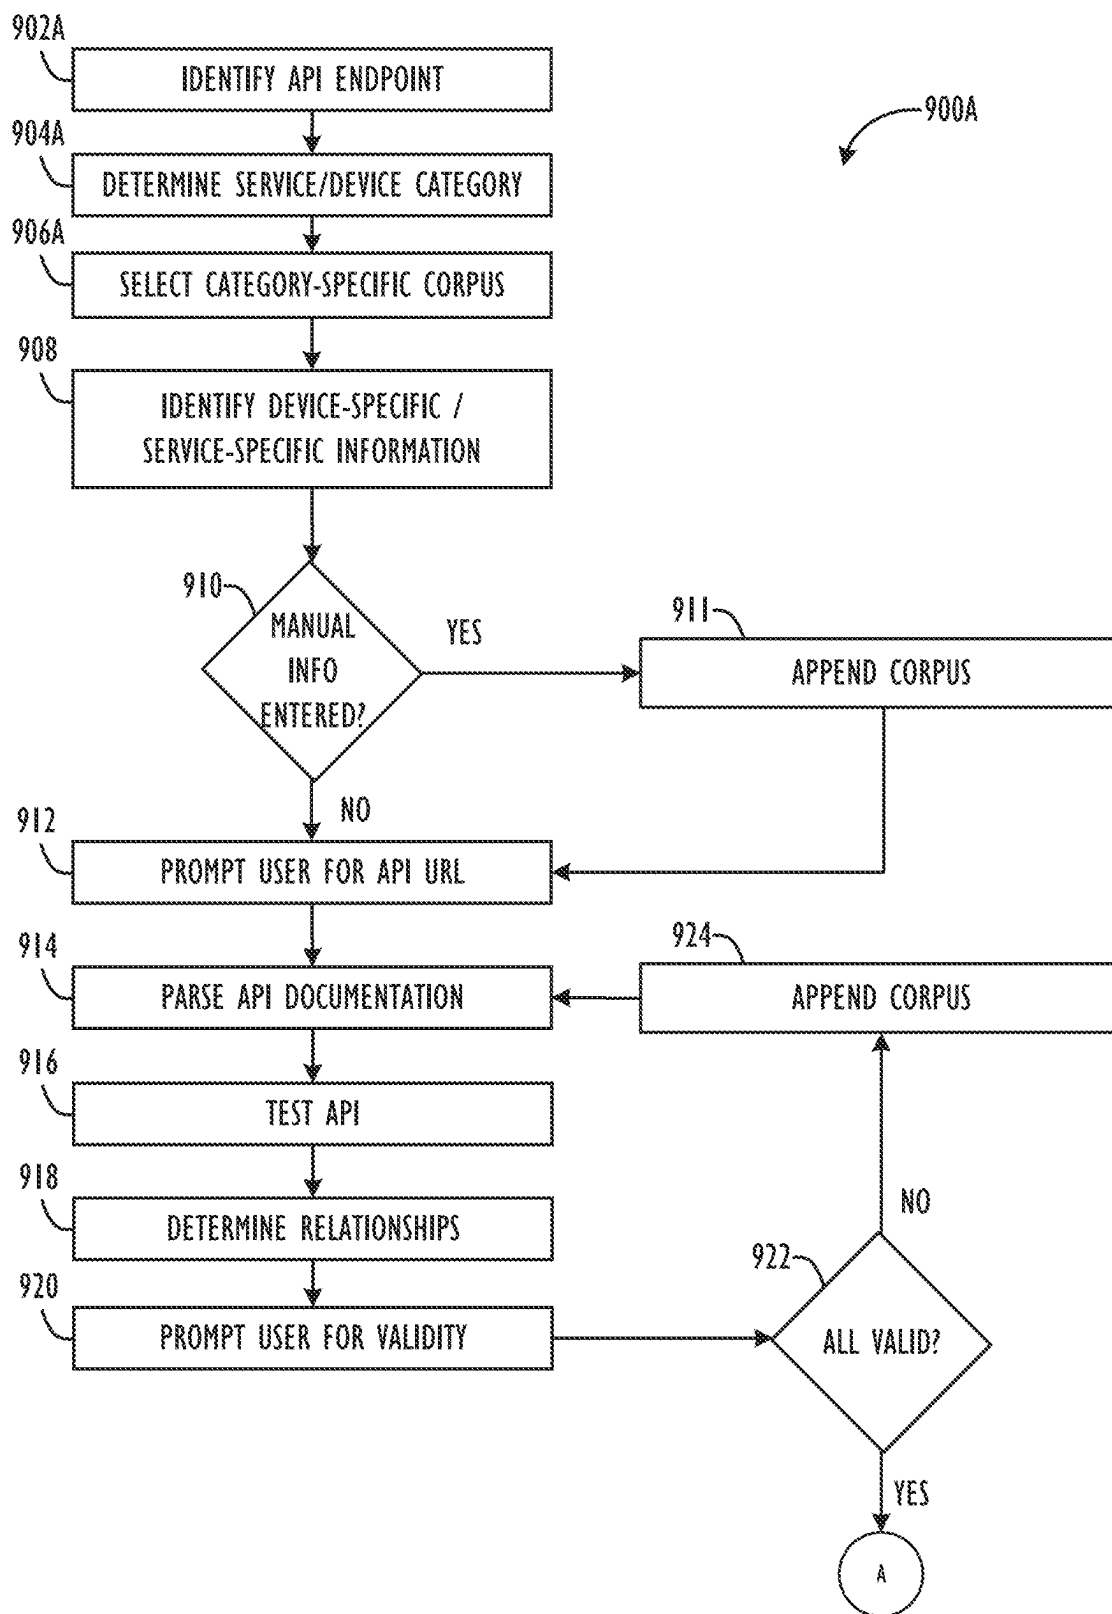


FIG. 9A

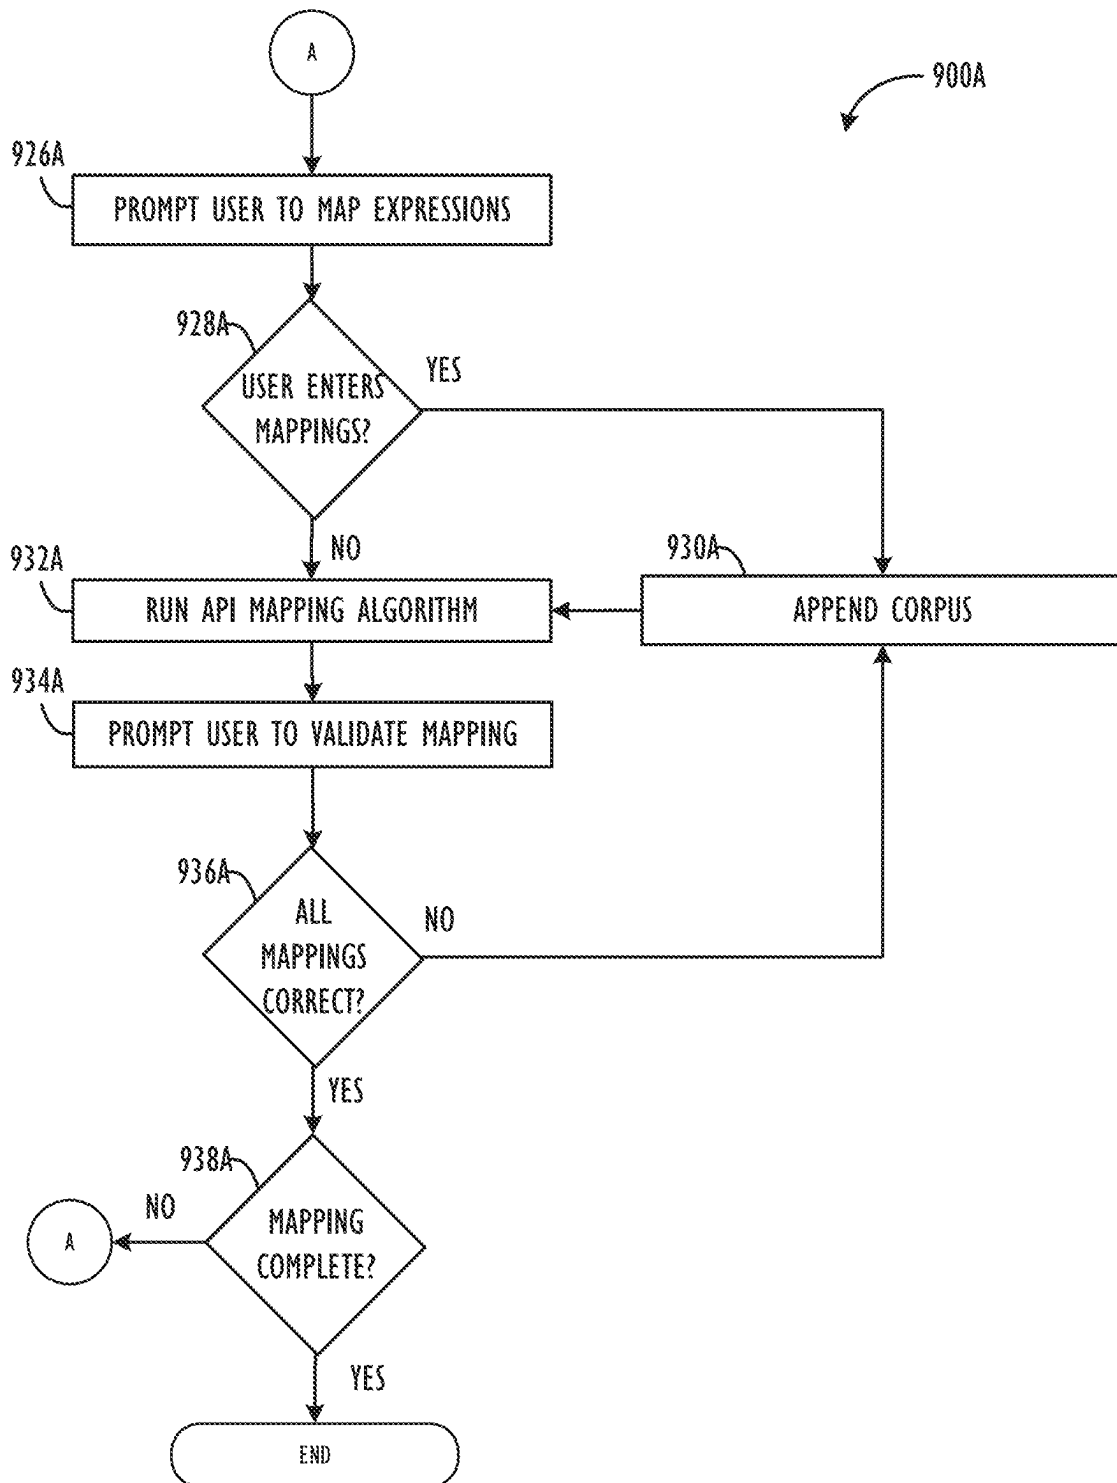


FIG. 9B

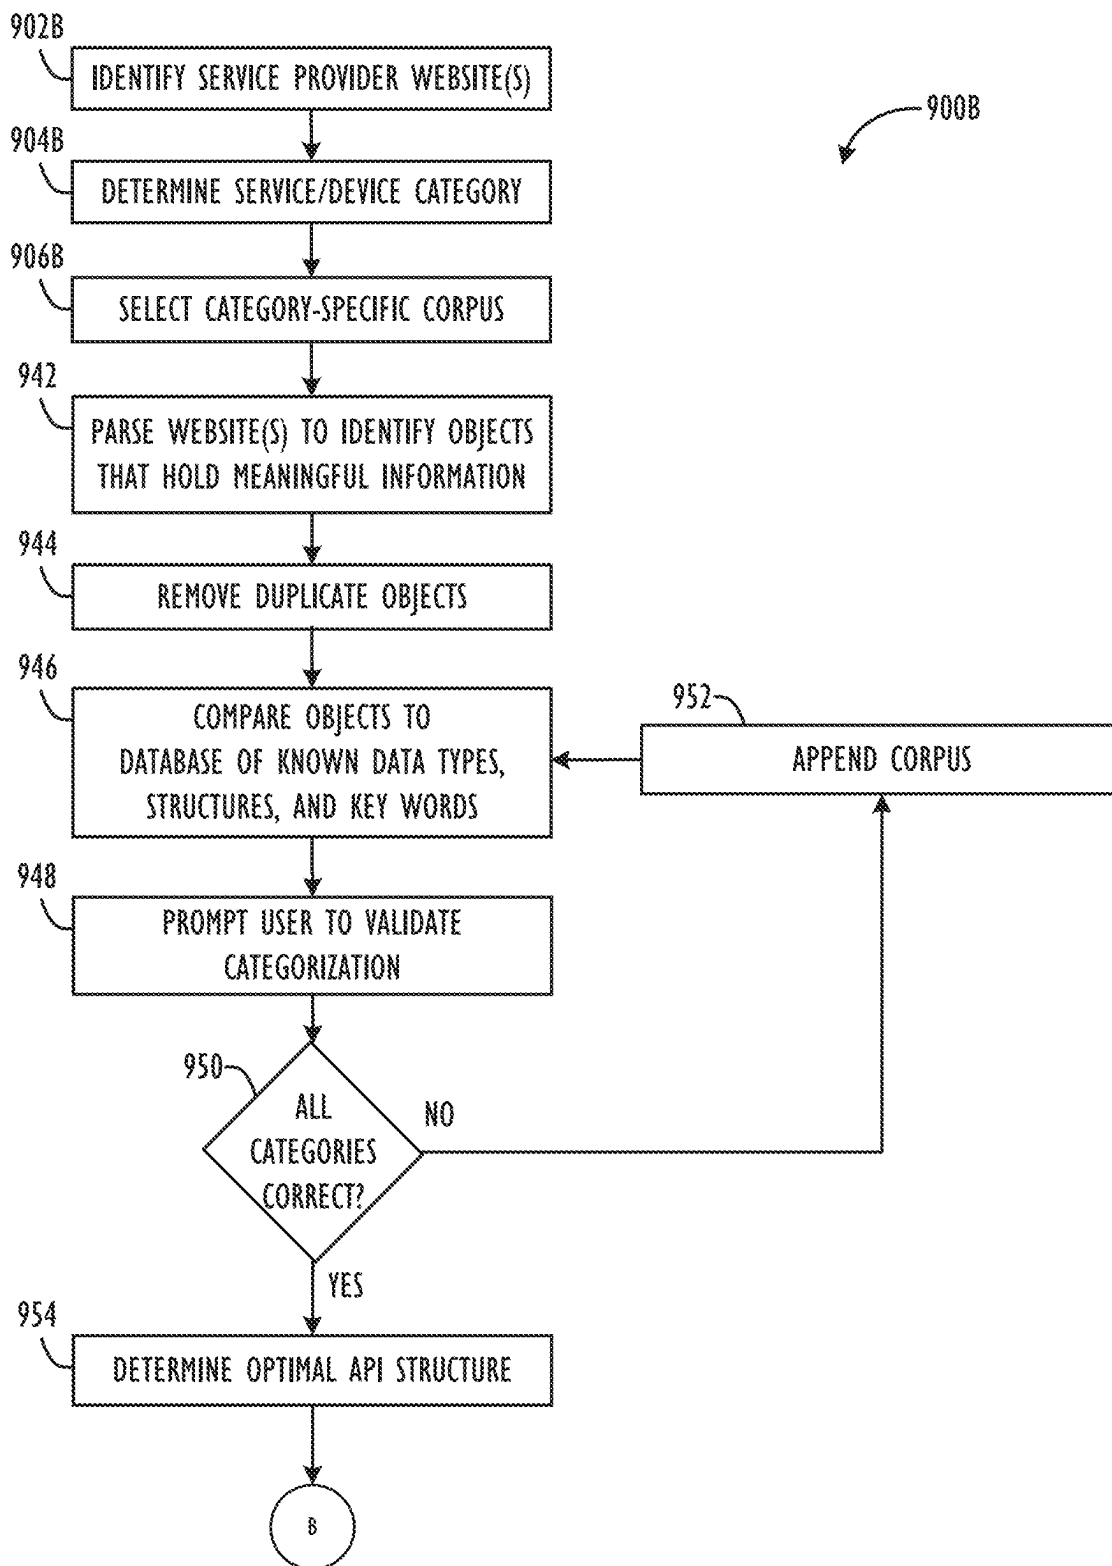


FIG. 9C

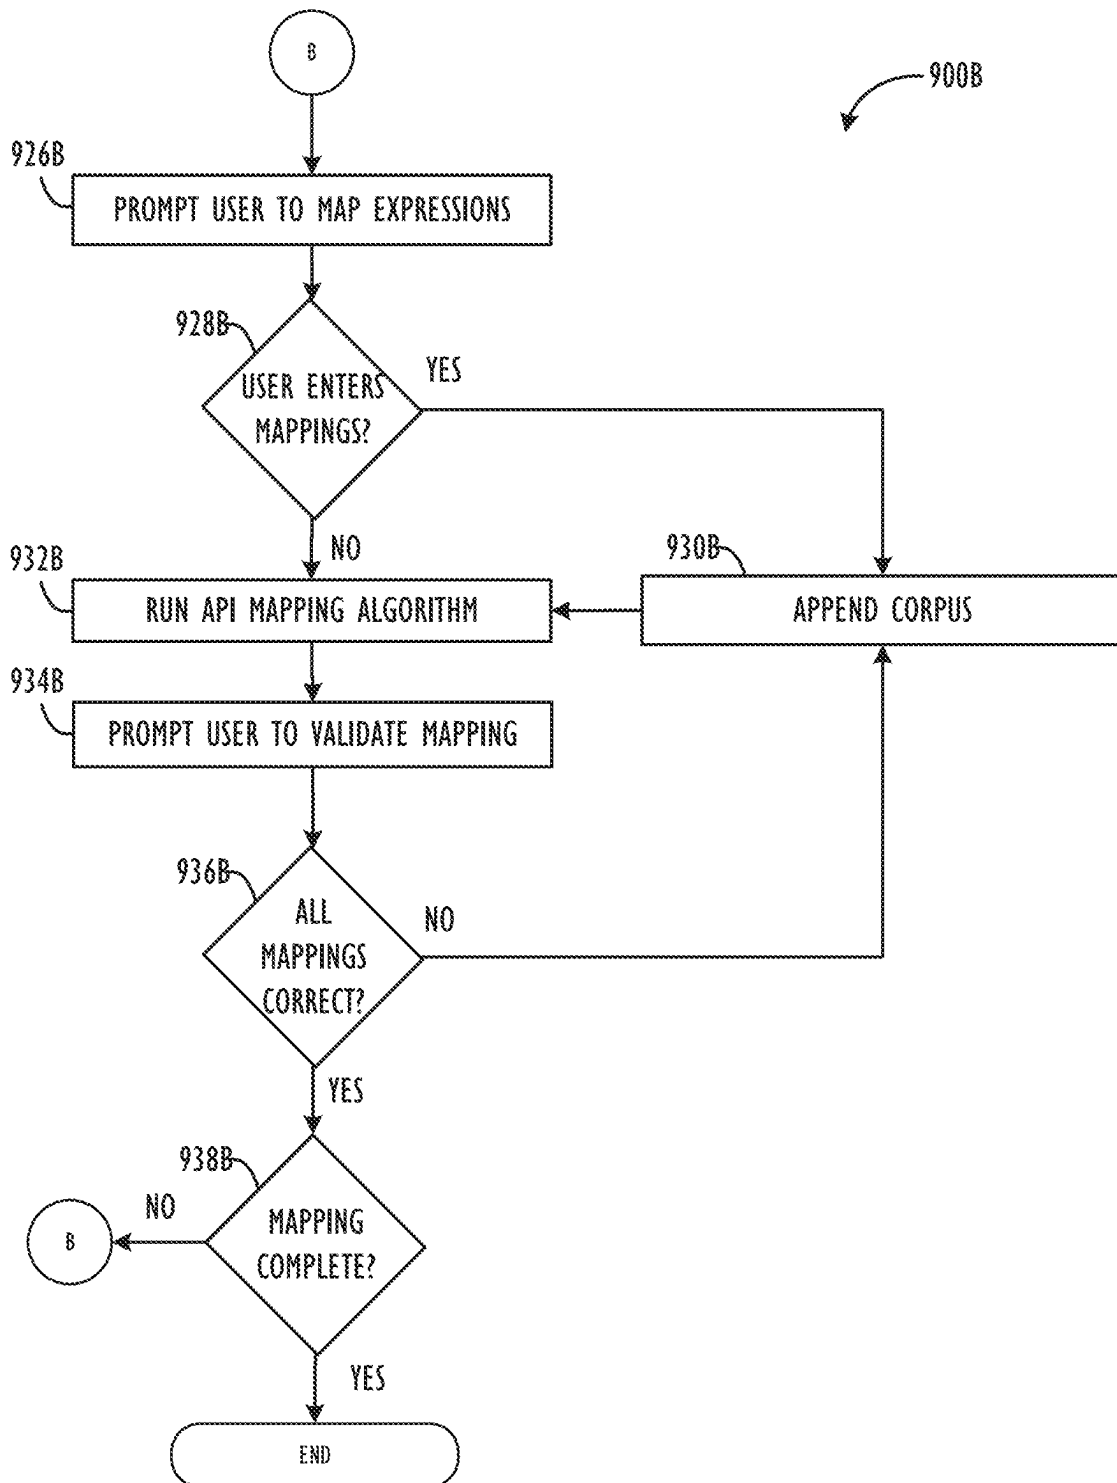


FIG. 9D

1

APPLICATION PROGRAM INTERFACE ANALYZER FOR A UNIVERSAL INTERACTION PLATFORM

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority to, and is a continuation of, U.S. patent application Ser. No. 17/009,000, filed Sep. 1, 2020, entitled “Application Program Interface Analyzer for a Universal Interaction Platform,” now U.S. Pat. No. 11,740,950 which is a continuation of U.S. patent application Ser. No. 16/511,944, filed Jul. 15, 2019, entitled “Application Program Interface Analyzer for a Universal Interaction Platform,” now issued as U.S. Pat. No. 10,761,910, which is a continuation of the commonly-assigned nonprovisional patent application having U.S. patent application Ser. No. 14/986,157, filed Dec. 31, 2015, entitled “Universal Interaction Platform for People, Services, and Devices,” now issued as U.S. Pat. No. 10,353,754, which claims priority to, and is a continuation of, the commonly-assigned nonprovisional patent application having U.S. patent application Ser. No. 14/986,111, filed Dec. 31, 2015, entitled “Universal Interaction Platform for People, Services, and Devices,” now issued as U.S. Pat. No. 10,135,764, all of which are hereby incorporated by reference in their entireties.

TECHNICAL FIELD

This disclosure relates generally to apparatuses, methods, and computer readable media for interacting with people, services, and devices across multiple communications formats and protocols.

BACKGROUND

A growing number of service providers allow users to request information or services from those service providers via a third party software applications. Additionally, a growing number of smart devices allow users to obtain information from and control those smart devices via a third party software application. Meanwhile, individuals communicate with each other using a variety of protocols such as email, text, social messaging, etc. In an increasingly chaotic digital world, it's becoming increasingly difficult for users to manage their digital interactions with service providers, smart devices, and individuals. A user may have separate software applications for requesting services from a number of service providers, for controlling a number of smart devices, and for communicating with individuals. Each of these separate software applications may have different user interfaces and barriers to entry.

The subject matter of the present disclosure is directed to overcoming, or at least reducing the effects of, one or more of the problems set forth above. To address these and other issues, techniques that enable seamless, multi-format, multi-protocol communications are described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram illustrating a network architecture infrastructure according to one or more disclosed embodiments.

FIG. 2A is a block diagram illustrating a computer which could be used to execute the multi-format/multi-protocol

2

communication approaches described herein according to one or more of disclosed embodiments.

FIG. 2B is a block diagram illustrating a processor core, which may reside on a computer according to one or more of disclosed embodiments.

FIGS. 3A through 3G show examples of a multi-protocol, multi-format inbox, according to one or more disclosed embodiments.

FIG. 4 is a block diagram of a universal interaction platform, according to one or more disclosed embodiments.

FIGS. 5A and 5B are examples of publicly available information regarding a service provider that may be downloaded by the universal interaction platform, according to one or more disclosed embodiments.

FIG. 6A shows exemplary protocols and formats required to output an instruction to a service provider via an application program interface (API).

FIG. 6B shows an exemplary format of a response from a service provider.

FIG. 7 shows an exemplary format of an object sent to and from a smart device

FIG. 8 shows a flowchart of a method for communicating with a smart device or a service provider, according to one or more disclosed embodiments.

FIGS. 9A and 9B show a flowchart of a method for determining the protocols and formats required by a smart device or service provider to interact with the smart device or service provider via an API, according to one or more disclosed embodiments.

FIGS. 9C and 9D show a flowchart of a process for determining the protocols and formats to obtain information regarding a service provider that provides the information in an unstructured format or in an unknown structure, according to one or more disclosed embodiments.

DETAILED DESCRIPTION

Disclosed are apparatuses, methods, and computer readable media for integrating communications for computing devices across multiple formats and multiple protocols. More particularly, but not by way of limitation, this disclosure relates to apparatuses, methods, and computer readable media to permit computing devices, e.g., smartphones, tablets, laptops, wearables, and the like, to present users with a multi-protocol, multi-format inbox for communicating with people and service providers and for controlling devices via multiple formats and communication protocols.

Referring now to FIG. 1, a network architecture infrastructure 100 is shown schematically. The infrastructure 100 includes computer networks 110, interaction platform devices 120, client devices 130, third party communications devices 140, third party service provider devices 150, and smart devices 160.

The computer networks 110 may include any communications network that allows computers to exchange data, such as the internet 111, local area networks 112, corporate networks 113, cellular communications networks 114, etc. Each of the computer networks 110 may operate using any number of network protocols (e.g., TCP/IP). The computer networks 110 may be connected to each other and to the various computing devices described herein (e.g., the interaction platform devices 120, the client devices 130, the third party communications devices 140, the third party service provider devices 150, and the smart devices 160) via hardware elements such as gateways and routers.

3

The interaction platform devices **120** may include one or more servers **121** and one or more storage devices **122**. The one or more servers **121** may include any suitable computer hardware and software configured to provide the features disclosed herein. The storage devices **122** may include any

tangible computer-readable storage media including, for example, read-only memory (ROM), random-access memory (RAM), magnetic disc storage media, optical storage media, solid state (e.g., flash) memory, etc.

The client devices **130** may include any number of

computing devices that enable an end user to access the features disclosed herein. For example, the client devices **130** may include, for example, desktop computers **131**, tablet computers **132**, mobile phone **133**, notebook computers **134**, etc.

The third party communications devices **140** may include email servers such as a GOOGLE® or YAHOO!® email server (GOOGLE is a registered service mark of Google Inc. YAHOO! is a registered service mark of Yahoo! Inc.), third party instant message servers such as a YAHOO!® Messenger or AOL® Instant Messaging server (AOL is a registered service mark of AOL Inc.), third party social network servers such as a FACEBOOK® or TWITTER® server (FACEBOOK is a registered trademark of Facebook, Inc. TWITTER is a registered service mark of Twitter, Inc.), cellular service provider servers that enable the sending and receiving of messages such as email messages, short message service (SMS) text messages, multimedia message service (MMS) messages, or any other device that enables individuals to communicate using any protocol and/or format.

The third party service devices **150** may include any number of computing devices that enable an end user to request one or more services via network communication.

The smart devices **160** may include any number of hardware devices that communicate via any of the computer networks **110** and are capable of being controlled via network communication.

As described in more detail below, the universal interaction platform allows users to interact with individuals, service providers, and smart devices **160** by sending a message (in the form of a message object) from a client device **130**. The message object is output by the client device **130** for transmittal to the server **121**. When the user is interacting with a service provider, the universal interaction platform formats an instruction for the third party service device **150** associated with the service provider and outputs the instruction from the server **121** for transmittal to the third party service device **150**. Similarly, when the user is interacting with a smart device **160**, the universal interaction platform formats an instruction for the smart device **160** and outputs the instruction from the server **121** for transmittal to the smart device **160**. The server **121** may also receive a response from the third party service device **150** or smart device **160**, format a response message (in the form of a response message object) for the user, and output the response message object for transmittal to the client device **130**.

Referring now to FIG. 2A, an example processing device **200** for use in the communication systems described herein according to one embodiment is illustrated in block diagram form. Processing device **200** may serve in, e.g., a server **121** or a client device **130**. Example processing device **200** comprises a system unit **205** which may be optionally connected to an input device **230** (e.g., keyboard, mouse, touch screen, etc.) and display **235**. A program storage device (PSD) **240** (sometimes referred to as a hard disk,

4

flash memory, or non-transitory computer readable medium) is included with the system unit **205**. Also included with system unit **205** may be a network interface **220** for communication via a network (either cellular or computer) with other mobile and/or embedded devices (not shown). Network interface **220** may be included within system unit **205** or be external to system unit **205**. In either case, system unit **205** will be communicatively coupled to network interface **220**. Program storage device **240** represents any form of non-volatile storage including, but not limited to, all forms of optical and magnetic memory, including solid-state storage elements, including removable media, and may be included within system unit **205** or be external to system unit **205**. Program storage device **240** may be used for storage of software to control system unit **205**, data for use by the processing device **200**, or both.

System unit **205** may be programmed to perform methods in accordance with this disclosure. System unit **205** comprises one or more processing units, input-output (I/O) bus **225** and memory **215**. Access to memory **215** can be accomplished using the communication bus **225**. Processing unit **210** may include any programmable controller device including, for example, a mainframe processor, a mobile phone processor, or, as examples, one or more members of the INTEL® ATOM™, INTEL® XEON™, and INTEL® CORE™ processor families from Intel Corporation and the Cortex and ARM processor families from ARM. (INTEL, INTEL ATOM, XEON, and CORE are trademarks of the Intel Corporation. CORTEX is a registered trademark of the ARM Limited Corporation. ARM is a registered trademark of the ARM Limited Company). Memory **215** may include one or more memory modules and comprise random access memory (RAM), read only memory (ROM), programmable read only memory (PROM), programmable read-write memory, and solid-state memory. As also shown in FIG. 2A, system unit **205** may also include one or more positional sensors **245**, which may comprise an accelerometer, gyrometer, global positioning system (GPS) device, or the like, and which may be used to track the movement of user client devices.

Referring now to FIG. 2B, a processing unit core **210** is illustrated in further detail, according to one embodiment. Processing unit core **210** may be the core for any type of processor, such as a micro-processor, an embedded processor, a digital signal processor (DSP), a network processor, or other device to execute code. Although only one processing unit core **210** is illustrated in FIG. 2B, a processing element may alternatively include more than one of the processing unit core **210** illustrated in FIG. 2B. Processing unit core **210** may be a single-threaded core or, for at least one embodiment, the processing unit core **210** may be multithreaded, in that, it may include more than one hardware thread context (or "logical processor") per core.

FIG. 2B also illustrates a memory **215** coupled to the processing unit core **210**. The memory **215** may be any of a wide variety of memories (including various layers of memory hierarchy), as are known or otherwise available to those of skill in the art. The memory **215** may include one or more code instruction(s) **250** to be executed by the processing unit core **210**. The processing unit core **210** follows a program sequence of instructions indicated by the code **250**. Each instruction enters a front end portion **260** and is processed by one or more decoders **270**. The decoder may generate as its output a micro operation such as a fixed width micro operation in a predefined format, or may generate other instructions, microinstructions, or control signals which reflect the original code instruction. The front end **260**

may also include register renaming logic 262 and scheduling logic 264, which generally allocate resources and queue the operation corresponding to the convert instruction for execution.

The processing unit core 210 is shown including execution logic 280 having a set of execution units 285-1 through 285-N. Some embodiments may include a number of execution units dedicated to specific functions or sets of functions. Other embodiments may include only one execution unit or one execution unit that can perform a particular function. The execution logic 280 performs the operations specified by code instructions.

After completion of execution of the operations specified by the code instructions, back end logic 290 retires the instructions of the code 250. In one embodiment, the processing unit core 210 allows out of order execution but requires in order retirement of instructions. Retirement logic 295 may take a variety of forms as known to those of skill in the art (e.g., re-order buffers or the like). In this manner, the processing unit core 210 is transformed during execution of the code 250, at least in terms of the output generated by the decoder, the hardware registers and tables utilized by the register renaming logic 262, and any registers (not shown) modified by the execution logic 280.

Although not illustrated in FIG. 2B, a processing element may include other elements on chip with the processing unit core 210. For example, a processing element may include memory control logic along with the processing unit core 210. The processing element may include I/O control logic and/or may include I/O control logic integrated with memory control logic. The processing element may also include one or more caches.

Multi-Protocol, Multi-Format Inbox

FIG. 3A shows an example of a multi-protocol, person-centric, multi-format inbox 300, according to one or more disclosed embodiments. The inbox 300 shown in FIG. 3A may, for example, be displayed on the display of any of the client devices 130 such as a desktop computer 131, a tablet computer 132, a mobile phone 133, a notebook computer 134, or other computing device. In certain embodiments, elements of the inbox 300 may be interacted with by a user utilizing a touchscreen interface or any other suitable input interface.

The inbox 300 enables user to interact with people across multiple formats and multiple protocols (e.g., email, text, voice, video, social messaging, etc.) as described, for example, in U.S. patent application Ser. No. 14/141,551, filed Dec. 27, 2013; U.S. Patent Application Ser. No. 14/168,815, filed Jan. 30, 2014; U.S. patent application Ser. No. 14/461,967, filed Aug. 18, 2014; and U.S. patent application Ser. No. 14/579,712, filed Dec. 22, 2014. The disclosure of each of the foregoing patent applications (collectively referred to herein as “The Entefy personal communications patent applications”) are hereby incorporated by reference. Each person is represented on a row. In the example of FIG. 3A, rows 304 and 308 represent people, specifically exemplary individuals ‘Emma Poter’ and ‘Peter Ehrmantraut.’

As is shown across the top row 302 of the inbox 300 also enables users to interact with service providers and devices via multiple formats and communication protocols. All messages may be combined together into a single, unified inbox, as is shown in FIG. 3A.

In the example of FIG. 3A, row 316 represents a smart device 160, for example a smart thermostat.

In the example of FIG. 3A, row 315 represents a service provider, for example an on-demand ride service.

Referring now to FIG. 3B, an example of an interface 320 to interact with a particular smart device 160 is shown, according to one or more disclosed embodiments. The interface 320 is output to the user, for example, if the user selects row 316 of the interface 300.

The top portion 321 of the interface 320 includes a pictorial icon 322 and the name of the particular smart device 160 (in this example, a smart thermostat) as well as buttons to view and/or change settings related to the smart device 160. The interface 320 also includes a device interface 325 to control the smart device 160. In this instance, up arrow 326 increases the target temperature 327 of the smart thermostat and the down arrow 328 decreases the target temperature 327. As described in more detail below, the universal interaction platform allows a user to interact with the smart device 160 by sending messages to the smart device 160 using natural language. In the example shown in FIG. 3B, row 330 represents messages to and from one smart thermostat and row 332 represents messages to and from all of the user’s smart thermostats. The universal interaction platform also allows a user to interact with a provider of the smart device 160. In the example shown in FIG. 3B, row 334 represents promotional messages from the provider of the smart thermostat.

Referring now to FIG. 3C, an example of an interface 340 for messages to and from a particular smart device 160 is shown, according to one or more disclosed embodiments. The interface 340 is output to the user, for example, if the user selects row 330 of the interface 320.

As described in more detail below, the interface 340 allows users to interact with the smart device 160 by sending messages using natural language. The universal interaction platform also receives responses from the smart device 160, formats the responses in the form of messages for the user from the smart device 160, and outputs the messages to the user via the interface 340. The interface 340 includes message history 342 showing messages from the user to the smart device 160 and responses from the smart device 160 in the form of messages to the user from the smart device 160. Messages to the smart device 160 may include text (input, for example, by a keyboard or virtual ‘on screen’ keyboard output by a touchscreen) or sound (input, for example, by a microphone). The interface 340 may include a text entry box 344 and a microphone icon 346 to record sound or convert speech to text. A back button 348 may be used to return to the interface 320 and a send button 349 may be used to send the message to the smart device 160.

Referring now to FIG. 3D, an example of an interface 350 for promotional messages from the provider of a smart device 160 is shown, according to one or more disclosed embodiments. The interface 350 is output to the user, for example, if the user selects row 334 of the interface 320.

The interface 350 includes a message area 352 where messages from the provider of the smart device 160 are displayed to the user. The interface 350 may also include a call button 354 to place a telephone call to the provider of the smart device 160. Similar to the interface 340, the interface 350 may also include a text entry box 344 to enter text-based response to the provider of the smart device 160, a send button 349 to send the text-based response, a microphone icon 346 to record sound or convert speech to text, and a back button 348 to return to the interface 320.

Referring now to FIG. 3E, an example of an interface 360 to interact with a particular service provider is shown, according to one or more disclosed embodiments. The interface 360 is output to the user, for example, if the user selects row 315 of the interface 300.

The top portion 361 of the interface 360 includes a pictorial icon 362 and the name of the particular service provider (in this example, a ride service) as well as buttons to view and/or change settings related to the service provider. The interface 360 also includes a service provider interface 362 to interact with the service provider. As described in more detail below, the universal interaction platform allows a user to request services from a service provider by sending messages using natural language. In the example shown in FIG. 3E, row 366 represents messages requesting services from the service provider and messages from the service provider regarding those services. In the example shown in FIG. 3E, row 368 represents promotional messages from the service provider.

Referring now to FIG. 3F, an example of an interface 370 for messages to and from a particular service provider is shown, according to one or more disclosed embodiments. The interface 370 is output to the user, for example, if the user selects row 366 of the interface 360.

As described in more detail below, the interface 370 allows users to interact with the service provider by sending messages using natural language. The universal interaction platform also receives responses from the service provider, formats the responses in the form of messages for the user from the service provider, and outputs the messages to the user via the interface 370. The interface 370 includes message history 372 showing messages from the user to the service provider and responses from the service provider in the form of messages to the user from the smart device 160. Messages to the service provider may include text (input, for example, by a keyboard or virtual 'on screen' keyboard output by a touchscreen) or sound (input, for example, by a microphone). Similar to the interface 340, the interface 370 may include a text entry box 344 to enter text-based messages to the service provider, a microphone icon 346 to record sound or convert speech to text, a back button 348 to return to the interface 360 and a send button 349 to send the message to service provider. Each service provider may have more than one protocol for requesting services from that service provider and/or for outputting responses to service requests. For example, sending a message requesting a car may require outputting instructions to an API while the ride service may send responses by SMS and email. SMS messages may be received from more than one phone number. Email messages may be received from more than one email address (e.g., receipts@rideservice.xyz, support@rideservice.xyz, etc.). Regardless of protocol or format, the universal interaction platform described herein combines all messages to and from each service provider regarding service requests into a single interface 370.

Referring now to FIG. 3G, an example of an interface 380 for promotional messages from a particular service provider is shown, according to one or more disclosed embodiments. The interface 380 is output to the user, for example, if the user selects row 368 of the interface 360.

Similar to the interface 350, the interface 380 includes a message area 352 where messages from the service provider are displayed to the user, a call button 354 to place a telephone call to the service provider, a text entry box 344 to enter text-based response to the service provider, a send button 349 to send the text-based response, a microphone icon 346 to record sound or convert speech to text, and a back button 348 to return to the interface 360.

Referring now to FIG. 4, the universal interaction platform 400 is illustrated in further detail, according to one or more disclosed embodiments. The universal interaction platform 400 includes a messaging service 420, an IoT (Internet

of Things) service 430, a natural language classifier 440, and an API analyzer 460. The IoT service 430 includes a number of IoT handlers 432. The messaging service 420, the IoT service 430, the IoT handlers 432, the natural language classifier 440, and the API analyzer 460 may be implemented as software modules stored on the storage device 122 and executed by the server 121.

The messaging service 420 sends and receives messages to and from the client devices 130 (via the inbox 300 and the interfaces 360, 380, etc. as described above). The messaging service 420 also communicates with the third party communications devices 140 as described, for example, in the Entefy personal communications patent applications, which are referenced above and incorporated by reference.

The IoT service 430 includes an IoT handler 432 for each service provider or smart device 160 supported by the universal interaction platform 400. Each IoT handler 432 may interact with a particular service provider or type (e.g., brand, model, etc.) of smart device 160. For example, IoT handler 432a may interact with the ride service described above while IoT handler 432i may interact with the smart thermostat described above.

The natural language classifier 440 is a machine learning tool that derives meaning from natural language by applying rules developed by analyzing a large corpora of real-world examples. As described in more detail below, the corpora may include publicly-available data sets as well as natural language documents collected by the universal interaction platform 400 such as messages output by users, descriptions of the services provided by the service providers, documentation regarding the services and the smart devices 160, etc.

The universal interaction platform 400 enables users to interact with smart devices 160 and service providers via the multi-protocol, multi-format inbox 300 illustrated in FIGS. 3A-3G.

In some instances, the universal interaction platform 400 obtains information regarding a service provider by downloading publicly-available information regarding the service provider and storing that information in a structured data set such that the universal interaction platform 400 is able to respond to user queries.

FIGS. 5A and 5B are examples of publicly available information regarding a service provider (in this example, a commuter train system) that may be downloaded by the universal interaction platform 400, according to one or more disclosed embodiments. As shown in Figure the universal interaction platform 400 may download information from the commuter train system website including, for example, the departure times of trains from stations and the locations of each of the stations. The universal interaction platform 400 stores the downloaded information in a structured data set such that the universal interaction platform 400 is able to provide the information in response to user queries. For example, in response to a query at 7:30 am regarding the next northbound train from Mountain View, the universal interaction platform 400 is able to respond that the next northbound train is scheduled to depart from Mountain View at 7:37.

The universal interaction platform 400 may periodically download information from service providers so as to provide real-time or near real-time information to users. Referring to FIG. 5B, for example, the commuter train system website is periodically updated with predicted departure information at each of the stations within the commuter train system. The universal interaction platform 400 may, for example, periodically download the predicted departure information, store the predicted departure information as

part of the structured data set, and output the predicted departure information in response to user queries. For example, in response to a user query regarding the next train to from Palo Alto to Menlo Park, the universal interaction platform 400 determines that the 231 and 233 trains stop at Menlo Park based on the information in Figure and determines that the 231 train is predicted to depart in 19 minutes based on the information in FIG. 5B.

In other instances, a service provider may maintain an application programming interface (API) that enables the universal interaction platform 400 to receive information regarding the services offered by the service provider and/or send instructions to the service provider. In this instance, the API documentation may specify the services provided by the service provider and the protocols and formats required by the service provider to request information regarding those services and/or to request those services.

FIG. 6A shows exemplary protocols and formats required to output an instruction to a service provider via an API (in this example, the ride service described above). The API may be configured to allow the universal interaction platform 400 to perform a function (i.e., request information or request a service) by outputting an instruction using a specified method to a specified endpoint with specified parameters. The methods, endpoints, and parameters may be specified in the API documentation. As shown in FIG. 6A, the ride service maintains an API that allows the universal interaction platform 400 to request, for example, a list of available services ("List products") at a particular location by specifying the longitude and latitude of the particular location and outputting an instruction to the specified endpoint (/v1/products) using the specified method (GET). The rider service API also allows the universal interaction platform 400 to request a service ("Create ride request") by outputting an instruction specifying the service (i.e., "product_id") and the start location (i.e., "start_latitude" and "start_longitude") and other optional parameters and to the specified endpoint (/v1/requests) using the specified method (POST).

An API may also specify the protocol for receiving information from the service provider and the format of the information output by the service provider. FIG. 6B shows an exemplary format of a response from a service provider (in this instance, a response from Uber to a request for a list of available services). As shown in FIG. 6B, the Uber API outputs a status code (200 OK) to indicate that the request was successfully processed and details regarding available services. In this instance, a non-luxury car ("display_name": "CarX"; "capacity": 4) and a sport utility vehicle ("display_name": "CarXL"; "capacity": 6) are available. The protocol for receiving information from the service provider and the format of the information output by the service provider may also be specified by the service provider in the API documentation.

In other instances, a smart device 160 may have an API that enables the universal interaction platform 400 to receive information stored in the smart device 160 and/or send instructions to the smart device 160 by sending and receiving an object to and from the smart device 160. The object may be, for example, in JavaScript Object Notation (JSON) format, extensible markup language (XML) format, etc. The protocol for communicating with the smart device 160 and the format of the object may be specified by the provider of the smart device 160 in the API documentation.

FIG. 7 shows an exemplary format of an object sent to and from a smart device 160 (in this example, the smart thermostat described above) to receive information from and

control the smart device 160. For example, the universal interaction platform 400 may receive an object from the thermostat with the data values shown in FIG. 7, store the data shown in FIG. 7, and output the information shown in FIG. 7 in response to a query from a user regarding the thermostat. For example, if a user submits a query regarding the ambient temperature, the universal interaction platform 400 outputs a message indicating that the ambient temperature is 72 degrees Fahrenheit based on the message object received from the thermostat.

In order to control the smart thermostat, the thermostat requires an object with the same data values shown in FIG. 7 and the relevant metadata for the particular thermostat. Accordingly, in response to a request from a user to set the target temperature to 68 degrees Fahrenheit, the universal interaction platform 400 outputs an object in the format shown in FIG. 7 (with the target_temperature_f value set to 68) for transmittal to the smart device 160 via, for example, the LAN 112, the internet 111, and the LAN 112.

FIG. 8 shows a flowchart 800 of a method for communicating with a smart device 160 or a service provider, according to one or more disclosed embodiments.

A client device 130 outputs a message object in step 802. The message object may be, for example, a universal message object in JavaScript Object Notation (JSON) format. The message object may include the body of the message input by the user, for example, via a message interface (e.g., 360, 380) and information indicative of the recipient (i.e., a smart device 160 or service provider) selected by the user via the inbox 300.

The messaging service 420 receives the message object in step 804 and saves a copy of the message in a database in step 806. The database may be stored, for example, in the storage device 122. The messaging service 420 determines the identity of the recipient in step 808. If the recipient is a person (Step 810: Yes), the messaging service 420 outputs the message to the recipient in step 812 (as described, for example, in "the Entefy personal communications patent applications, which are referenced above and incorporated by reference).

If the recipient is a smart device 160 or a service provider (Step 810: No), the natural language classifier 440 parses the message content to determine the intent of the user in step 814. The natural language classifier 440 determines user intent by making a probabilistic determination based on a large data set of information including previous messages output by the user and other users, documentation regarding the selected smart device 160 or service provider, publicly available and other natural language data sets. For each smart device 160 and service provider supported by the universal interaction platform 400, for example, the universal interaction platform 400 may store a map in the storage device 122 that associates natural language expressions previously sent by users (or that could potentially be sent by users) with user intents relevant to the smart device 160 or service provider. The natural language classifier 440 determines the user intent by finding the natural language expression that is most similar to the message sent by the user and selecting the user intent associated with the natural language expression. Using a smart thermostat (e.g., Next) as an example, an exemplary map is shown in Table 1.

TABLE 1

User Intent	Natural Language Expression
Set target temperature to <temp>	"Set the temperature to <temp>" "Set temp to <temp>" "Set thermostat to <temp>" "I'd like it to be <temp> in here" "Make it <temp>"
Increase target temperature by <delta_temp>	"Increase the temperature by <delta_temp>" "Make it <delta_temp> hotter" "Make it <delta_temp> warmer" "Bump it up <delta_temp> degrees"
Decrease target temperature by <delta_temp>	"Decrease the temperature by <delta_temp>" "Make it <delta_temp> cooler" "Make it <delta_temp> colder" "Drop it down <delta_temp> degrees"
Output target temperature	"What are you set to?"
Output ambient temperature	"What's the temperature?"

If, for example, the universal interaction platform **400** receives a message from a user stating "I'd like it to be 68 in my house," the natural language classifier **440** compares the message received from the user with the natural language expressions stored in the map and determines the natural language expression ("I'd like it to be <temp> in here") that is most similar to the message received from the user ("I'd like it to be 68 in my house") and selects the user intent (in this instance, to set the temperature to 68) associated with the most similar natural language expression.

The universal interaction platform **400** also determines user intent based on other factors, such as the location of the client device **130** and/or the time the message object was output by the client device **130** (or received by the server **121**). Returning to the ride service example above, a user may output a message requesting a ride and the universal interaction platform **400** may determine that the user intent is to request a ride from the current location of the client device **130**. Returning to the commuter train system example above, a user near may output a message asking about the next train to San Francisco. The universal interaction platform **400** may determine that the client device **130** is closest to Palo Alto and, therefore, may determine that, in this instance, the user intent is to request the departure time for the next train to San Francisco from Palo Alto. Furthermore, the universal interaction platform **400** may determine that the client device **130** is closest to Palo Alto but is not close enough for the user to board the next train to San Francisco. Accordingly, the universal interaction platform **400** may determine that the user intent, in this instance, is to request the departure time for the second train to San Francisco from Palo Alto.

The universal interaction platform **400** also determines user intent based on previous messages output by the user via the inbox **300**. Accordingly, universal interaction platform **400** may also store a map of natural language expressions for a particular user. Returning to the smart thermostat example above, an exemplary map of natural language expressions for a particular user is shown in Table 2.

TABLE 2

User Intent	Natural Language Expression
degrees Fahrenheit	"degrees"
2 degrees Fahrenheit	"a few degrees" "a bit"
Increase temperature by <delta_temp>	"Bump it up <delta_temp> degrees"
Decrease temperature by <delta_temp>	"Drop it down <delta_temp> degrees"

TABLE 2-continued

User Intent	Natural Language Expression
Output ambient temperature	"Is it hot in here?"
Increase temperature by 2 degrees F	"I'm cold"
Set target temperature to 68 degrees F	"Brian is coming over"

If, for example, the universal interaction platform **400** receives a message from the user associated with Table 2 stating "Make it a bit warmer", the natural language classifier **440** compares the message received from the user with the natural language expressions stored in Tables 1 and 2, determines the natural language expressions ("Make it <delta temp> warmer" and "a bit") that are most similar to the messages received from the user ("Make it a bit warmer"), and determines the intent of the user. In this example, the intent of the user to increase the temperature is found in Table 1 and the exact value of the increase is found in Table 2.

The universal interaction platform **400** develops the map of natural language expressions for a particular user based on previous messages output by the user via the inbox **300**. For example, the first time a user outputs a message to the universal interaction platform **400** for transmittal to the smart thermostat and the universal interaction platform **400** cannot determine the user intent based on the map used for all users shown in Table 1 (for example, when the user says "a bit" or "I'm cold" or "Brian is coming over"), the universal interaction platform **400** may ask the user to clarify how the user would like the smart thermostat to respond and then store that user intent for future use when the user outputs another message using similar language. Returning to the ride service example above, if the user requests a ride from "Brian's house", the universal interaction platform **400** may ask "Where is Brian's house?" (or "Are you currently at Brian's house?") and then map the user's response (or the location of the client device **130**) to "Brian's house" for future use.

Because there is a finite number of relevant instructions for each smart device **160** or service provider, there is a finite number of relevant user intents. Accordingly, the universal interaction platform **400** is able to map each user intent to any number of natural language expressions. The natural language classifier **440** is then able to quickly and accurately determine the user intent based on the natural language expressions used by the user.

The IoT handler **432** associated with the selected service provider or smart device **160** formats an instruction for the

13

smart device **160** or service provider in step **816**. The universal interaction platform **400** stores the formats and protocols required by each of the smart devices **160** and service providers supported by the platform in the storage device **122**. Additionally, the universal interaction platform stores a map associating each of the user intents described above with a properly formatted instruction for the smart device **160** and service provider.

Using a smart thermostat again as an example, a map associating each of the user intents described above with a properly formatted instruction is shown in exemplary Table 3.

TABLE 3

User Intent	Instruction
Set temperature to <temp>	target_temperature_f: <temp>
Increase temperature by <delta_temp>	target_temperature_f: target_temperature_f + <delta_temp>
Decrease temperature by <delta_temp>	target_temperature_f: target_temperature_f - <delta_temp>
Output target temperature	RETURN target_temperature_f
Output ambient temperature	RETURN ambient_temperature_f

In the smart thermostat example above, the IoT handler **432** associated with the type of smart thermostat formats an instruction to set the temperature to 68 degrees Fahrenheit by building a JSON object with the metadata for the specific smart thermostat and the required data values (for example, device_id: peyiJNo0lldT2YiIVtYaGQ; locale: en-US; . . . target_temperature_f: 68) and outputting the JSON object for transmittal to the thermostat.

Using the ride service again as an example, the IoT handler **432** associated with the ride service request formats an instruction to request a ride by including all of the required parameters specified in the API documentation (for example, start_latitude: 37.334381; start_longitude: -121.89432; end_latitude: 37.77703; end_longitude: -122.419571; product_id: a1111c8c-c720-46c3-8534-2fcd730040d) and outputting the instruction to the API endpoint (/v1/requests) specified in the API documentation.

In other instances, the IoT service **430** may determine that the most probable way to interact with a service provider is to send an email to the service provider. For example, a user may input a query requesting a quote for new electric service from XYZ Electric. The universal interaction platform **400**, having previously downloaded information from the XYZ website, may not have the information necessary to respond to the user query but may have determined that requests for services may be sent by email to bob@xyzelectric.com. Accordingly, the IoT Service **430** may determine that the method that will most probably return an answer to the user query is to have the messaging service **420** format an email with the fields required for that particular service provider (for example, to: bob@xyzelectric.com) and a body of the email indicative of the user intent (for example, body: "A user has requested a quote for a new electric service.") and output the email message to the service provider.

If the IoT handler **432** associated with the device **160** or service provider selected by the user is unable to format the instruction for the smart device **160** or service provider (Step **818**: No), the natural language classifier **440** parses the message object (received from the user in step **804**) to determine the relevant device category or service category in step **822**. For example, the relevant category may be transit.

The IoT service **430** determines the IoT handlers **432** that are relevant to the device category or service category in step

14

824. The relevant IoT handlers **432** may be selected from among the IoT handlers **432** associated with smart devices or services set up by the user.

The IoT service **430** outputs the message object to all of the relevant IoT handlers **432** in step **826**. Each of the IoT handlers **834** respond to the message object with a given confidence level that the message object is relevant to the smart device **160** or service provider associated with that IoT handler **432** in step **828**. The IoT service **430** selects the IoT service **432** with the highest confidence level in step **830**. The selected IoT handler **432** formats an instruction in step **831** as described above with reference to step **816**.

The IoT handler **432** (or the messaging service **420**) outputs the instruction for transmittal to the smart device **160** or third party service provider device **150** in step **820**.

The IoT handler **432** may receive a response from the service provider device **150** or the smart device **160** in step **832**. The response may be in the form of an object, an email message, an SMS message, etc. As described above with reference to FIGS. 6B and 7B, responses from service provider devices **150** and smart devices **160** have a format that is known to the universal interaction platform **400**. For example, the format of response messages may be specified in the API documentation. In another example, the format of response messages may be determined by parsing previous response messages from the same smart device **160** or service provider device **150**. Accordingly, the universal interaction platform **400** is able to parse the response for information relevant to the user and output a message to the user. As shown in FIGS. 3C and 3E, the response message to the user is output by the universal interaction platform **400** via the multi-format, multi-protocol inbox **300** as if the response message is from the smart device **160** or service provider.

The messaging service **420** formats the response message for the user in step **834**. The response message is output using natural language. The tone of the natural language may be based on user preferences stored, for example, in the storage device **122**. The user preferences may specify a different tone for different services. For example, a user may specify a more formal tone (e.g., "Sir, your car has arrived" and "Thank you. We hope you enjoyed your trip") when the requested service is a luxury car and a more informal tone (e.g., "Your car is here" and "Trip complete") when the requested service is not a luxury car.

Additionally or alternatively, the tone of response messages output on behalf of a service provider or a smart device **160** may be specified by the service provider or provider of the smart device. A service provider or provider of a smart device may specify different tones for response messages based on the demographics of the user (age, gender, etc.). The preferences of the service providers and/or providers of smart devices **160** may be stored in the storage device **122**.

The universal interaction platform **400** updates the user preferences in the database in step **836**.

The messaging service **420** outputs the response message to the user in step **838**.

AI-Driven API Analyzer

As described above, the universal interaction platform **400** outputs instructions to third party smart devices **160** and service providers to perform certain functions. The protocols and formats required by a device or service provider to perform those functions may be determined manually. Additionally or alternatively, those protocols and formats may be determined by the API analyzer **460** as described below.

15

FIGS. 9A and 9B show a flowchart of a process 900a for determining the protocols and formats required by a smart device 160 or service provider to interact with the smart device 160 or service provider using natural language via an API, according to one or more disclosed embodiments.

An API endpoint for a service provider or smart device is identified in step 902a. In some instances, a user (for example, a developer for the service provider or provider of the smart device 160) may identify an API endpoint by registering a device 160 or service with the universal interaction platform 400. For example, the API analyzer 460 may include a user interface that allows a user to enter the universal resource locator (URL) of the API endpoint. In other instances, the universal interaction platform 400 may identify the API endpoint, for example by crawling the internet and identifying devices 160 or service providers to add to the universal interaction platform 400.

A service category or device category is determined in step 904a. For example, the service category for a ride service may be “on-demand transit” while the device category for a smart thermostat may be “appliance” or “smart home.” The service category or device category may be selected by the user. For example, the API analyzer 460 may include a user interface that allows a user to select the device category or service category. Additionally or alternatively, the natural language classifier 440 may determine a device category or service category by analyzing documentation (e.g., a website and/or API documentation) regarding the service provider or smart device 160.

A category-specific corpus is selected in step 906a based on the service category or device category determined in step 904a. A corpus is a collection of information about the words and phrases of a language and about the lexical categories to which those words belong. The API analyzer 460 may store a category-specific corpus for each of a plurality of potential service categories and device categories in the storage device 122. For each word and/or phrase in the category-specific corpus, the category-specific corpus may include, for example, definitions, parts of speech, synonyms, lexical connections to other words or phrases, etc. The category-specific corpus may also include weighted probabilities that each word or phrase in the category-specific corpus is related to other words or phrases in the category-specific corpus. As additional service providers and smart devices 160 are added to the universal interaction platform 400 over time, the category-specific corpora may be modified to include additional words and phrases that are relevant to that particular category. The API analyzer 460 may also store a global corpus that may be used for all smart devices 160 and service providers or for the smart devices 160 and service providers that are unrelated to the category-specific corpora.

As described in detail below, the API analyzer 460 forms a service-specific or device-specific corpus by appending the category-specific corpus (or global corpus) to include words or phrases relevant to the specific smart device 160 or service.

The user is prompted to manually identify service-specific or device-specific information in step 908. Service-specific or device-specific information may include words or phrases that are relevant to the specific service or smart device 160. The API analyzer 460 may enable the user, for example, to manually describe service-specific or device-specific words or phrases, to upload a service-specific or device-specific dictionary, to identify an object (e.g., a JSON object, an XML object, etc.) that is relevant to the service-specific or device-specific API, etc. If the user manually identifies

16

service-specific or device-specific information (Step: 910: Yes), the API analyzer 460 appends the category-specific corpus (selected in step 906a) to include the service-specific or device-specific information in step 911. Because the category-specific corpus may be appended to include service-specific or device-specific information, it is referred to below as a service-specific or device-specific corpus.

The user is prompted to enter a URL of API documentation in step 912. The API analyzer 460 parses the API documentation in step 914. The API analyzer 460 may determine, for example, the functions available via the API, and the API endpoints, methods, and parameters required to request those functions (as shown, for example, in FIG. 6A). If the API requires that an object (as shown, for example, in FIG. 7) be output to a smart device 160 or service provider device 150, the API analyzer 460 may determine, for example, the data values of the object, whether a function may be performed by changing one or more of the data values, etc.

The API analyzer 460 tests the API in step 916. Because the API documentation parsed in step 914 may be incomplete or inaccurate, the API analyzer 460 may determine, for example, whether the API may be used to perform additional functions (for example, by including different parameters than are identified in the API documentation). The API analyzer 460 may also receive and parse response messages received from the API.

The API analyzer 460 uses the service-specific or device-specific corpus described above to make probabilistic determinations of the relationships between words and phrases related to the service provider or smart device 160 (e.g., words or phrases used in the API documentation, the API endpoints, the API parameters, the data values of the object, etc.) in step 918. For example, the API analyzer 460 may determine whether a word or phrase is a subset of another word or phrase, whether those words or phrases are synonymous, whether those words or phrases are unrelated, etc.

The API analyzer 460 may prompt the user to verify the previous determinations in step 920. For example, the API analyzer 460 may display the API endpoints, methods, and parameters identified in step 914 via a graphical user interface and prompt the user to confirm whether those API endpoints, methods, and parameters are accurate and complete. The API analyzer 460 may also prompt the user to verify whether the relationships between words and phrases determined in step 918 are accurate. (For example, one API endpoint identified in step 914 may be /calendars/{calendarId}/events/{eventId}. Based on the API endpoint, the API analyzer 460 may determine that ‘event’ (or ‘events’) is not synonymous with ‘calendar’ or ‘calendars’ but is instead a separate referencable object. However, the API analyzer 460 may determine that there still exists a probability that ‘calendar’ and ‘events’ refer to the same thing. Accordingly, the API analyzer 460 may prompt the user to verify the previous determination that ‘calendar’ and ‘events’ are not synonymous but rather are a separate referencable objects.)

If the user indicates that one or more of the previous determinations were invalid (Step 922: No), the API analyzer 460 appends the service-specific or device-specific corpus in step 924 and returns to step 914. The API analyzer 460 may then re-parse the API documentation to determine API functions, endpoints, methods, and parameters (step 914), re-test the API (step 916, if necessary), make additional determinations regarding the relationships between words and phrases related to the service provider or smart device 160 (step 918) and prompt the user to verify the

17

additional determinations (step 920) with the additional information in the device-specific or service-specific corpus.

In step 926a, the API analyzer 460 prompts the user to identify natural language expressions (i.e., instructions and/or queries) that are relevant to the smart device 160 or service provider (as described above, for example, with reference to Table 1) and the API functions and parameters necessary for the smart device 160 or service provider to respond to those instructions or queries (as described above, for example with reference to Table 3).

If the user maps API functions and parameters with natural language expressions (Step 928a: Yes) the API analyzer 460 appends the device-specific or service-specific corpus in step 930a.

In step 932a, the API analyzer 460 maps additional natural language expressions to the API functions and parameters identified in step 914. The additional natural language expressions may be identified by parsing the device-specific or service-specific corpus. The additional natural language expressions may also be natural language expressions that were previously determined to be relevant to the same category of smart device 160 or service provider. Additionally, the additional natural language expressions may be identified based on messages sent by users via the universal interaction platform 400. For example, the universal interaction platform 400 may store messages sent to other users, services or smart devices 160, categorize each message as relevant to certain categories of services or smart devices 160, and identify potentially-relevant natural language expressions from the messages that were identified as relevant to the category of services or smart devices 160. (For the purposes of determining potentially-relevant natural language expressions, the messages are stored without personally identifiable information.)

In step 934a, the API analyzer 460 prompts the user to validate the API mapping performed in step 932a. If any of the mappings were invalid (Step 936a: No), the API analyzer 460 appends the device-specific or service-specific corpus in step 930a and re-runs the API mapping algorithm with the additional information in step 932a. The API analyzer 460 also prompts the user to validate that the API mapping is complete in step 934a. If the user wishes to map additional natural language expressions to API functions (Step 938a: No), the process returns to step 926a. Otherwise (step 938a: Yes), the process is complete.

FIGS. 9C and 9D show a flowchart of a process 900b for determining the protocols and formats to obtain information regarding a service provider that provides the information in an unstructured format or in an unknown structure, according to one or more disclosed embodiments. The process 900b may be used, for example, when a service provider does not maintain an API. The process 900b includes operations that are similar to the process 900a, which are referred to using like numbers.

Websites that describe the services provided by a service provider website are identified in step 902b. The websites may include the service provider website, a third party review website describing the service provider, etc. In some instances, a user (for example, the service provider) may identify the service provider websites via a user interface. In other instances, the universal interaction platform 400 may identify the service provider websites, for example by crawling the internet and identifying service providers to add to the universal interaction platform 400.

A service category is determined (for example, by user selection or by the API analyzer 460 parsing the service provider websites) in step 904b. A category-specific corpus

18

is selected in step 906b based on the service category determined in step 904b. The category-specific corpus is appended to form a service-specific corpus as described below.

The API analyzer 460 parses the content of the service provider websites to extract distinct objects that hold potentially meaningful information in step 942. (If a service provider website says, for example, "We are available from 9 am to 10 pm at 215-569-5500 with friendly service" the API analyzer 460 may determine that '9 am,' '10 pm' and '215-569-5500' are potentially meaningful whereas "with friendly service" is not an object that includes potentially meaningful information.) The meaningful information may include any information relevant to the service provider or the services offered by the service provider. For example, the API analyzer 460 may parse a restaurant website and extract objects that include information regarding the service provider such as the name, address, telephone number, reviews, hours of operation, etc. as well as objects that include information regarding the services, such as the title, description, and price of each menu item. In the commuter train system example described above with reference to FIGS. 5A and 5B, the API analyzer 460 may parse the commuter train system website and extract objects that include the name and address of each station, the name of each train, and the departure times for each train, etc. The API analyzer 460 stores the objects, for example, in the storage device 122. Each time the API analyzer 460 determines that a distinct object on the service provider websites includes relevant information, the API analyzer 460 may store the location of that object so that the API analyzer 460 can periodically re-parse the service provider websites and quickly and easily update the information stored in the storage device 122.

The API analyzer 460 removes duplicate objects in step 944. The service provider websites may list certain information (for example, an address or phone number) in more than one location. Additionally, some of the same information may be included in both a service provider website and a third-party review website. Accordingly, the API analyzer 460 eliminates the duplicate objects.

The API analyzer 460 determines a probably category for each object by comparing the objects to a database of known data types, structures, and/or keywords in step 946. In the example above, the API analyzer 460 may compare the object '215-569-5500' to the database of known data types, structures, and/or keywords and determine based on the comparison to the database that the most probable category of that object is a phone number.

The API analyzer 460 may prompt the user to validate the categorization of each object in step 948. In the example above, the API analyzer 460 may prompt the user to confirm that '215-569-5500' is a phone number. If the user indicates that any of the categorizations are incorrect (Step 950: No), the service-specific corpus is appended to include this additional information in step 952 and the API analyzer returns to step 946 and re-categorizes the objects.

Once the user indicates that all of the categorizations are correct (Step 950: Yes), the API analyzer 460 determines an optimal API structure in step 954 for users to query the dataset of information regarding the service provider. The optimal API structure is a map linking the objects extracted from the service provider websites with queries for returning that meaningful information. The queries and the objects may have a many-to-many relationship. Using the example above, the map may include the example queries and the objects as shown in Table 4.

19

TABLE 4

Query	Object(s)
getPhoneNumber()	215-569-5500
getAddress()	One Logan Square 130 North 18th Street Philadelphia, PA 19103-6998
getBusinessInfo()	Blank Rome LLP One Logan Square 130 North 18th Street Philadelphia, PA 19103-6998 215-569-5500

Using the commuter train system example described above with reference to Figures and 5B, the optimal API structure may include queries and parameters. For example, one query may be ‘getDepartureTimes(startingStation, direction, currentTime)’ where the query is a request for the departure times based on parameters that include the departure station (‘startingStation’), the direction of travel (direction’) and the current time (‘currentTime’). In another example, a query may be ‘getTransitTime(startingStation, endingStation, currentTime)’ where the query is a request for a travel time between a departure station and a destination (‘endingStation’) with an additional parameter of the current time used to identify the next available train to use when calculating the travel time.

The API analyzer 460 may determine the optimal API structure by comparing the dataset for the service provider to other API structures within the universal interaction platform 400 and selecting an API structure (for example, an API structure developed by a third party developer) that is used to output similar types of data. If none of the API structures within the universal interaction platform 400 are used to output similar types of data, the API analyzer 460 may simply store each object separately and create a separate query to return each of the objects. If the universal interaction platform 400 includes multiple APIs that are used to output similar types of data, the API analyzer 460 may select the API structure that is most commonly used to output similar types of data. The universal interaction platform 400 may also include an internal rating of some or all of the API structures and the API analyzer 460 may select the highest rated API structure from among the API structures that are used for similar types of data.

As described above with reference to FIG. 9C, the API analyzer 460 extracts information regarding a service provider—information that may be in an unstructured format or in an unknown structure—and organizes that information in a structured format similar to the API structures developed by third parties as described above with reference to FIGS. 9A and 9B. The remaining steps of the process 900b, which are shown in FIG. 9D, as similar to the process 900a, except that the process 900a maps natural language expressions to functions available via a third party API whereas the process 900b maps natural language expressions to queries identified by the API analyzer 460 in step 954.

In step 926b, the API analyzer 460 prompts the user to map the queries identified by the API analyzer 460 in step 954 with natural language expressions (i.e., queries). Using the examples in Table 4 above, the map may include the example mappings shown in Table 5.

20

TABLE 5

Query	Natural Language Expression
getPhoneNumber()	What is the phone number?
getAddress()	What is the address?

Using the commuter train system example described above, the map may include the example mappings shown in Table 6.

TABLE 6

Query	Natural Language Expression
getDepartureTimes(Palo Alto, North, currentTime)	When are the next northbound train from Palo Alto?
getTransitTime(Palo Alto, San Francisco, currentTime)	How long will it take to get from Palo Alto to San Francisco?

If the user maps API functions and parameters with natural language expressions (Step 928b: Yes) the API analyzer 460 appends the service-specific corpus in step 930b.

In step 932b, the API analyzer 460 maps additional natural language expressions to the queries identified by the API analyzer 460 in step 954. The additional natural language expressions may be identified by parsing the service-specific corpus. The additional natural language expressions may also be natural language expressions that were previously determined to be relevant to the same category of service provider. Additionally, the additional natural language expressions may be identified based on messages sent by users via the universal interaction platform 400. For example, the universal interaction platform 400 may store messages sent to other users, services or smart devices 160, categorize each message as relevant to certain categories of service providers, and identify potentially-relevant natural language expressions from the messages that were identified as relevant to the category of service providers. (For the purposes of determining potentially-relevant natural language expressions, the messages are stored without personally identifiable information.)

In step 934b, the API analyzer 460 prompts the user to validate the mappings performed in step 932b. If any of the mappings were invalid (Step 936b: No), the API analyzer 460 appends the service-specific corpus in step 930b and re-runs the API mapping algorithm with the additional information in step 932b. The API analyzer 460 also prompts the user to validate that the API mapping is complete in step 934b. If the user wishes to map additional natural language expressions to API functions (Step 938b: No), the process returns to step 926b. Otherwise (step 938b: Yes), the process is complete.

EXAMPLES

The following examples pertain to further embodiments.

Example 1 is a computer-implemented method of determining protocols and formats to interact with a service provider or smart device via an application program interface (API), comprising: identifying an API endpoint for the service provider or smart device; determining a service category or device category for the service provider or smart device; selecting a category-specific corpus based on the service category or device category; forming a service-specific or device-specific corpus by appending information regarding the service provider or smart device to the cat-

21

egory-specific corpus; parsing API documentation to determine functions available via the API and parameters required to request the functions available via the API; and mapping the functions and parameters to natural language expressions.

Example 2 includes the subject matter of example 1, wherein the API endpoint and the service category or device category are determined based on user input.

Example 3 includes the subject matter of example 1, further comprising: prompting a user to manually input information regarding the service provider or smart device; and appending the information manually input by the user to the service-specific or device-specific corpus.

Example 4 includes the subject matter of example 1, further comprising: determining relationships between words or phrases included in the API documentation; prompting a user to validate the relationships between the words or phrases included in the API documentation; and appending the service-specific or device-specific corpus based on the user validation.

Example 5 includes the subject matter of example 1, wherein mapping the functions and parameters to natural language expressions comprises: prompting a user to map one or more of the functions and parameters to natural language expressions; appending the service-specific or device-specific corpus based on the user mapping; and mapping additional functions and parameters to natural language expressions or mapping the one or more functions and parameters to additional natural language expressions.

Example 6 includes the subject matter of example 1, wherein mapping the functions and parameters to natural language expressions further comprises: prompting a user to validate the mappings of the functions and parameters to natural language expressions.

Example 7 is an application program interface (API) analyzer, comprising: one or more storage devices that store a plurality of category-specific corpuses; a user-interface; one or more processing units that: identify an API endpoint for the service provider or smart device; determine a service category or device category for the service provider or smart device; select one of the category-specific corpuses based on the service category or device category; form a service-specific or device-specific corpus by appending information regarding the service provider or smart device to the category-specific corpus; store the service-specific or device-specific corpus in the one or more storage devices; parse API documentation to determine functions available via the API and parameters required to request the functions available via the API; map the functions and parameters to natural language expressions; store the mappings in the one or more storage devices.

Example 8 includes the subject matter of example 7, wherein the one or more processing units: prompt a user to manually input information regarding the service provider or smart device via the graphical user interface and append the information manually input by the user to the service-specific or device-specific corpus; determine relationships between words or phrases included in the API documentation, prompt the user to validate the relationships between the words or phrases included in the API documentation via the graphical user interface, and append the service-specific or device-specific corpus based on the user validation; or map the functions and parameters to natural language expressions by prompting a user to map one or more of the functions and parameters to natural language expressions via the graphical user interface, appending the service-specific or device-specific corpus based on the user mapping, and

22

mapping additional functions and parameters to natural language expressions or maps the one or more functions and parameters to additional natural language expressions.

Example 9 includes the subject matter of example 7, wherein the one or more processing units: prompt a user to validate the mappings of the functions and parameters to natural language expressions via the graphical user interface.

Example 10 is a non-transitory computer readable storage medium (CRSM) comprising computer executable instructions stored thereon to cause one or more processing units to: identify an application program interface (API) endpoint for the service provider or smart device; determine a service category or device category for the service provider or smart device; select a category-specific corpus based on the service category or device category; form a service-specific or device-specific corpus by appending information regarding the service provider or smart device to the category-specific corpus; parse API documentation to determine functions available via the API and parameters required to request the functions available via the API; and map the functions and parameters to natural language expressions.

Example 11 includes the subject matter of example 10, wherein the API endpoint and the service category or device category are determined based on user input.

Example 12 includes the subject matter of example 10, wherein the instructions further cause the one or more processing units to: prompt a user to manually input information regarding the service provider or smart device; and append the information manually input by the user to the service-specific or device-specific corpus.

Example 13 includes the subject matter of example 10, wherein the instructions further cause the one or more processing units to: determine relationships between words or phrases included in the API documentation; prompt a user to validate the relationships between the words or phrases included in the API documentation; and append the service-specific or device-specific corpus based on the user validation.

Example 14 includes the subject matter of example 10, wherein the instructions further cause the one or more processing units to map the functions and parameters to natural language expressions by: prompting a user to map one or more of the functions and parameters to natural language expressions; appending the service-specific or device-specific corpus based on the user mapping; and mapping additional functions and parameters to natural language expressions or mapping the one or more functions and parameters to additional natural language expressions.

Example 15 includes the subject matter of example 10, wherein the instructions further cause the one or more processing units to: prompt a user to validate the mappings of the functions and parameters to natural language expressions.

Example 16 is another non-transitory computer readable storage medium (CRSM) comprising computer executable instructions stored thereon to cause one or more processing units to: identify service provider websites; determine a service category for the service provider; select a category-specific corpus based on the service category; form a service-specific corpus by appending information regarding the service provider to the category-specific corpus; parse the service provider websites to extract objects that include meaningful information regarding the service provider or services offered by the service provider; categorize each of the extracted objects by comparing the extracted objects to a database of known data types, structures, and/or keywords

and associating each of the extracted objects with a category; map each of the extracted objects to one or more queries; and map each of the queries to natural language expressions.

Example 17 includes the subject matter of example 16, wherein the service provider websites are determined based on user input.

Example 18 includes the subject matter of example 16, wherein the instructions further cause the one or more processing units to prompt a user validate the categorization of each of the extracted objects.

Example 19 includes the subject matter of example 16, wherein the instructions cause the one or more processing units to map each of the queries to natural language expressions by: prompting a user to map one or more of the queries to natural language expressions; appending the service-specific corpus based on the user mapping; and mapping additional queries to natural language expressions or map the one or more queries to additional natural language expressions.

Example 20 includes the subject matter of example 16, wherein the instructions further cause the one or more processing units to: prompt a user to validate the mappings of the queries to the natural language expressions.

In the foregoing description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, to one skilled in the art that the disclosed embodiments may be practiced without these specific details. In other instances, structure and devices are shown in block diagram form in order to avoid obscuring the disclosed embodiments. References to numbers without subscripts or suffixes are understood to reference all instance of subscripts and suffixes corresponding to the referenced number. Moreover, the language used in this disclosure has been principally selected for readability and instructional purposes, and may not have been selected to delineate or circumscribe the inventive subject matter, resort to the claims being necessary to determine such inventive subject matter. Reference in the specification to “one embodiment” or to “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least one disclosed embodiment, and multiple references to “one embodiment” or “an embodiment” should not be understood as necessarily all referring to the same embodiment.

It is also to be understood that the above description is intended to be illustrative, and not restrictive. For example, above-described embodiments may be used in combination with each other and illustrative process steps may be performed in an order different than shown. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention therefore should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, terms “including” and “in which” are used as plain-English equivalents of the respective terms “comprising” and “wherein.”

What is claimed is:

1. A computer-implemented method of determining at least one user intent for interacting with an automated computing system, the computer-implemented method comprising:

receiving a message from a user for the automated computing system, wherein the message comprises message objects in the message;

executing, for the automated computing system, a natural language classifier comprising a machine learning engine including at least one machine learning model trained using a corpora of natural language expressions associated with different user intents, wherein the corpora of natural language expressions comprises service description information for services provided by at least one service provider and previous messages sent by one or more users including the user;

generating, by the natural language classifier using the machine learning engine, weighted probabilities that words or phrases from the message objects in the message are related to words or phrases from the corpora of natural language expressions;

determining, using the natural language classifier from the weighted probabilities, a natural language expression from the corpora of natural language expressions;

associating, using the natural language classifier, the natural language expression with the at least one user intent; and

providing, via the automated computing system, a response to the message based on the associating.

2. The computer-implemented method of claim 1, wherein the corpora of natural language expressions associated with the different user intents comprises a mapping for the automated computing system for different probabilistic determinations by the natural language classifier of the different user intents based on the service description information and the previous messages, and wherein the mapping comprises links of each of the different user intents to the natural language expressions appearing in one or more of the service description information and the previous messages based on similarity scores determined by the machine learning engine.

3. The computer-implemented method of claim 1, wherein the generating the weighted probabilities comprises: applying a plurality of rules developed for the natural language classifier by analyzing a plurality of real-world examples for the service description information and the previous messages using the machine learning engine.

4. The computer-implemented method of claim 1, wherein the service description information comprises descriptions of services provided by the at least one service provider, documentation regarding the services, or documentation of one or more smart devices providing the services on behalf of the at least one service provider, and wherein the one or more smart devices are communicatively coupled to the natural language classifier.

5. The computer-implemented method of claim 4, wherein the automated computing system utilizes one or more Internet of Things (IOT) handlers to interact with the at least one service provider or the at least one smart device, wherein the one or more IoT handlers are configured to format the query or the instruction for the at least one service provider or the at least one smart device using a data format or a data protocol available to the universal interaction platform.

6. The computer-implemented method of claim 1, wherein the message comprises a natural language statement by the user for a query or an instruction requesting a service, wherein the associating comprises mapping the natural language statement to one or more functions or one or more parameters that the at least one service provider or at least one smart device for the at least one service provider is configured to perform for the service, and wherein, prior to the generating the weighted probabilities, the computer-implemented method further comprises:

25

determining any settings by the user related to requesting the service via user interface of a universal interaction platform for the automated computing system, wherein the settings are used with the message for requesting the service via the query or the instruction.

7. The computer-implemented method of claim 6, wherein the response comprises the query or the instruction to the at least one service provider or the at least one smart device based on the associating, and wherein prior to the providing the response, the computer-implemented method further comprises:

formatting the response based on the data format or the data protocol.

8. The computer-implemented method of claim 1, wherein the associating the natural language expression with the at least one user intent is based on at least one of a location of the user or a time that the message was provided by the user.

9. An automated computing system including a universal interaction platform for determining at least one user intent for interacting with the automated computing system, the automated computing system comprising:

a non-transitory computer readable storage medium; and a software module stored on the non-transitory computer readable storage medium, the software module configured to determining the at least one user intent from a message, wherein the non-transitory computer readable storage medium comprises computer executable instructions stored thereon to cause one or more processing units to perform operations comprising:

receiving the message from a user for the automated computing system, wherein the message comprises message objects in the message;

executing, for the automated computing system, a machine learning engine including at least one machine learning model trained using a corpora of natural language expressions associated with different user intents, wherein the corpora of natural language expressions comprises service description information for services provided by at least one service provider and previous messages sent by one or more users including the user;

generating, by the machine learning engine, weighted probabilities that words or phrases from the message objects in the message are related to words or phrases from the corpora of natural language expressions;

determining, using the weighted probabilities, a natural language expression from the corpora of natural language expressions;

associating the natural language expression with the at least one user intent; and

providing, via the automated computing system, a response to the message based on the associating.

10. The automated computing system of claim 9, wherein the corpora of natural language expressions associated with the different user intents comprises a mapping for the automated computing system for different probabilistic determinations of the different user intents based on the service description information and the previous messages, and wherein the mapping comprises links of each of the different user intents to the natural language expressions appearing in one or more of the service description information and the previous messages based on similarity scores determined by the machine learning engine.

11. The automated computing system of claim 9, wherein the generating the weighted probabilities comprises: apply-

26

ing a plurality of rules developed for the natural language classifier by analyzing a plurality of real-world examples for the service description information and the previous messages using the machine learning engine.

12. The automated computing system of claim 9, wherein the service description information comprises descriptions of services provided by the at least one service provider, documentation regarding the services, or documentation of one or more smart devices providing the services on behalf of the at least one service provider, and wherein the one or more smart devices are communicatively coupled to the machine learning engine.

13. The automated computing system of claim 12, wherein the automated computing system utilizes one or more Internet of Things (IOT) handlers to interact with the at least one service provider or the at least one smart device, wherein the one or more IoT handlers are configured to format the query or the instruction for the at least one service provider or the at least one smart device using a data format or a data protocol available to the universal interaction platform.

14. The automated computing system of claim 13, wherein the associating the natural language expression with the at least one user intent is based on at least one of a location of the user or a time that the message was provided by the user.

15. The automated computing system of claim 9, wherein the message comprises a natural language statement by the user for a query or an instruction requesting a service, wherein the associating comprises mapping the natural language statement to one or more functions or one or more parameters that the at least one service provider or at least one smart device for the at least one service provider is configured to perform for the service, and wherein, prior to the generating the weighted probabilities, the operations further comprise: determining any settings by the user related to requesting the service via user interface of the universal interaction platform for the automated computing system, wherein the settings are used with the message for requesting the service via the query or the instruction.

16. The automated computing system of claim 15, wherein the response comprises the query or the instruction to the at least one service provider or the at least one smart device based on the associating, and wherein prior to the providing the response, the operations further comprise:

formatting the response based on the data format or the data protocol.

17. A non-transitory computer readable storage medium comprising computer executable instructions stored thereon to cause one or more processing units to perform operations comprising:

receiving a message from a user for an automated computing system, wherein the message comprises message objects in the message;

executing, for the automated computing system, a natural language classifier comprising a machine learning engine including at least one machine learning model trained using a corpora of natural language expressions associated with different user intents, wherein the corpora of natural language expressions comprises service description information for services provided by at least one service provider and previous messages sent by one or more users including the user;

generating, by the natural language classifier using the machine learning engine, weighted probabilities that words or phrases from the message objects in the

27

message are related to words or phrases from the corpora of natural language expressions;
 determining, using the natural language classifier from the weighted probabilities, a natural language expression from the corpora of natural language expressions;
 associating, using the natural language classifier, the natural language expression with at least one user intent; and
 providing, via the automated computing system, a response to the message based on the associating.

18. The non-transitory computer readable storage medium of claim **17**, wherein the corpora of natural language expressions associated with the different user intents comprises a mapping for the automated computing system for different probabilistic determinations by the natural language classifier of the different user intents based on the service description information and the previous messages, and wherein the mapping comprises links of each of the different user intents to the natural language expressions appearing in one or more

28

of the service description information and the previous messages based on similarity scores determined by the machine learning engine.

19. The non-transitory computer readable storage medium of claim **17**, wherein the generating the weighted probabilities comprises: applying a plurality of rules developed for the natural language classifier by analyzing a plurality of real-world examples for the service description information and the previous messages using the machine learning engine.

20. The non-transitory computer readable storage medium of claim **14**, wherein the service description information comprises descriptions of services provided by the at least one service provider, documentation regarding the services, or documentation of one or more smart devices providing the services on behalf of the at least one service provider, and wherein the one or more smart devices are communicatively coupled to the natural language classifier.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 12,093,755 B2
APPLICATION NO. : 18/347199
DATED : September 17, 2024
INVENTOR(S) : Alston Ghafourifar, Philip Nathan Greenberg and Neil Achtman

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims

Claim 20, Column 28, Lines 11-12 change “medium of claim 14,” to --medium of claim 17,--.

Signed and Sealed this
Fourth Day of February, 2025

A handwritten signature in black ink, reading "Coke Morgan Stewart". The signature is fluid and cursive, with the first name "Coke" being the most prominent.

Coke Morgan Stewart
Acting Director of the United States Patent and Trademark Office